

SOLTIS® 92

WIDTH: 177 cm

WEIGHT: 420 g/sqm


LENGTHS*: ± 50 ml



FACADES BLINDS



GLASS ROOFS BLINDS

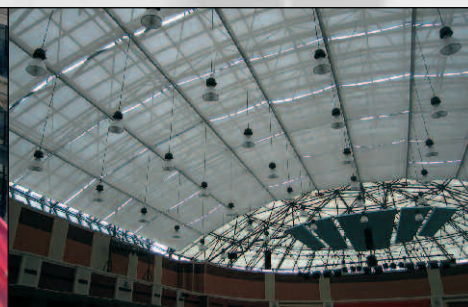

GUARANTEES AND LABELS



NEEDS


- ▶ FACADES DIRECTLY EXPOSED TO THE SUN
- ▶ FOR MAXIMUM TEMPERATURE COMFORT
- ▶ LIGHTING COMFORT WITHOUT DAZZLE
- ▶ TRANSPARENCY AND LUMINOSITY
- ▶ ADAPTED FOR LARGE BLINDS

ADVANTAGES

- ▶ FERRARI® PRÉCONTRAIT TEXTILE
- ▶ OUTSTANDING DIMENSIONAL STABILITY
- ▶ STRENGTH PROVEN IN ALL CIRCUMSTANCES
- ▶ TEAR STRENGTH WITHOUT ADDITIONAL REINFORCEMENTS
- ▶ NO BAGGING OR SAGGING
- ▶ MAINTENANCE: FERRARI® CLEAN (P. 79)

COLOURS & REFERENCES

(COLOURS ARE INDICATIVE)

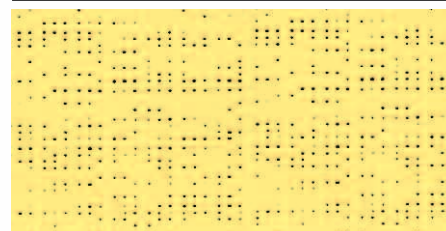

Ref. 92-2013

Ref. 92-2001	Ref. 92-2031
Ref. 92-2002	Ref. 92-2032
Ref. 92-2003	Ref. 92-2035
Ref. 92-2004	Ref. 92-2037
Ref. 92-2005	Ref. 92-2039
Ref. 92-2006	Ref. 92-2040
Ref. 92-2007	Ref. 92-2042
Ref. 92-2008	Ref. 92-2043
Ref. 92-2009	Ref. 92-2044
Ref. 92-2010	Ref. 92-2045
Ref. 92-2011	Ref. 92-2046*
Ref. 92-2012	Ref. 92-2047
Ref. 92-2014	Ref. 92-2048
Ref. 92-2016	Ref. 92-2051*
Ref. 92-2019	Ref. 92-2053
Ref. 92-2020	Ref. 92-2065
Ref. 92-2021	Ref. 92-2069
Ref. 92-2022	Ref. 92-2070
Ref. 92-2023	Ref. 92-2072
Ref. 92-2024	Ref. 92-2074*
Ref. 92-2025	Ref. 92-2088
Ref. 92-2027	Ref. 92-2089
Ref. 92-2030	Ref. 92-2090

* Different colour on the back side

TECHNICAL SPECIFICATIONS

	SOLTIS® 92	
WEIGHT	420 g/sqm	EN ISO 2286-2
THICKNESS	0.45 mm	
WIDTH	177 cm	
TENSILE STRENGTH (WARP/WEFT)	310/210 daN/5 cm	EN ISO 1421
TEAR STRENGTH (WARP/WEFT)	45/20 daN/5 cm	DIN 53.363
FLAME RETARDANCY	M1/NFP 92-507 • Test 1/NFPA 701 • CSFM T19 • ASTM E84-03 • B1/DIN 4102-1 • BS 7837 • B1/ONORM B 3800-1 • CLASSE 1/UNI 9177 • M1/UNE 23.727 • VKF 5.2/SN 198898 B-s2,d0/EN 13501-1	
EUROCLASS	B-s2,d0/EN 13501-1	
QUALITY MANAGEMENT SYSTEM	ISO 9001	
ENVIRONMENT MANAGEMENT SYSTEM	ISO 14001	

The technical characteristics shown are average values given as a guide and may be modified.
*Our packaging data are given for information only and may vary as a function of manufacturing conditions.