

KONYA


INSTALLATION INSTRUCTIONS



All weather protection systems!

RETRACTABLE
AWNINGS.COM

Tel: (305) 628-2424 or
(866) 438-2964

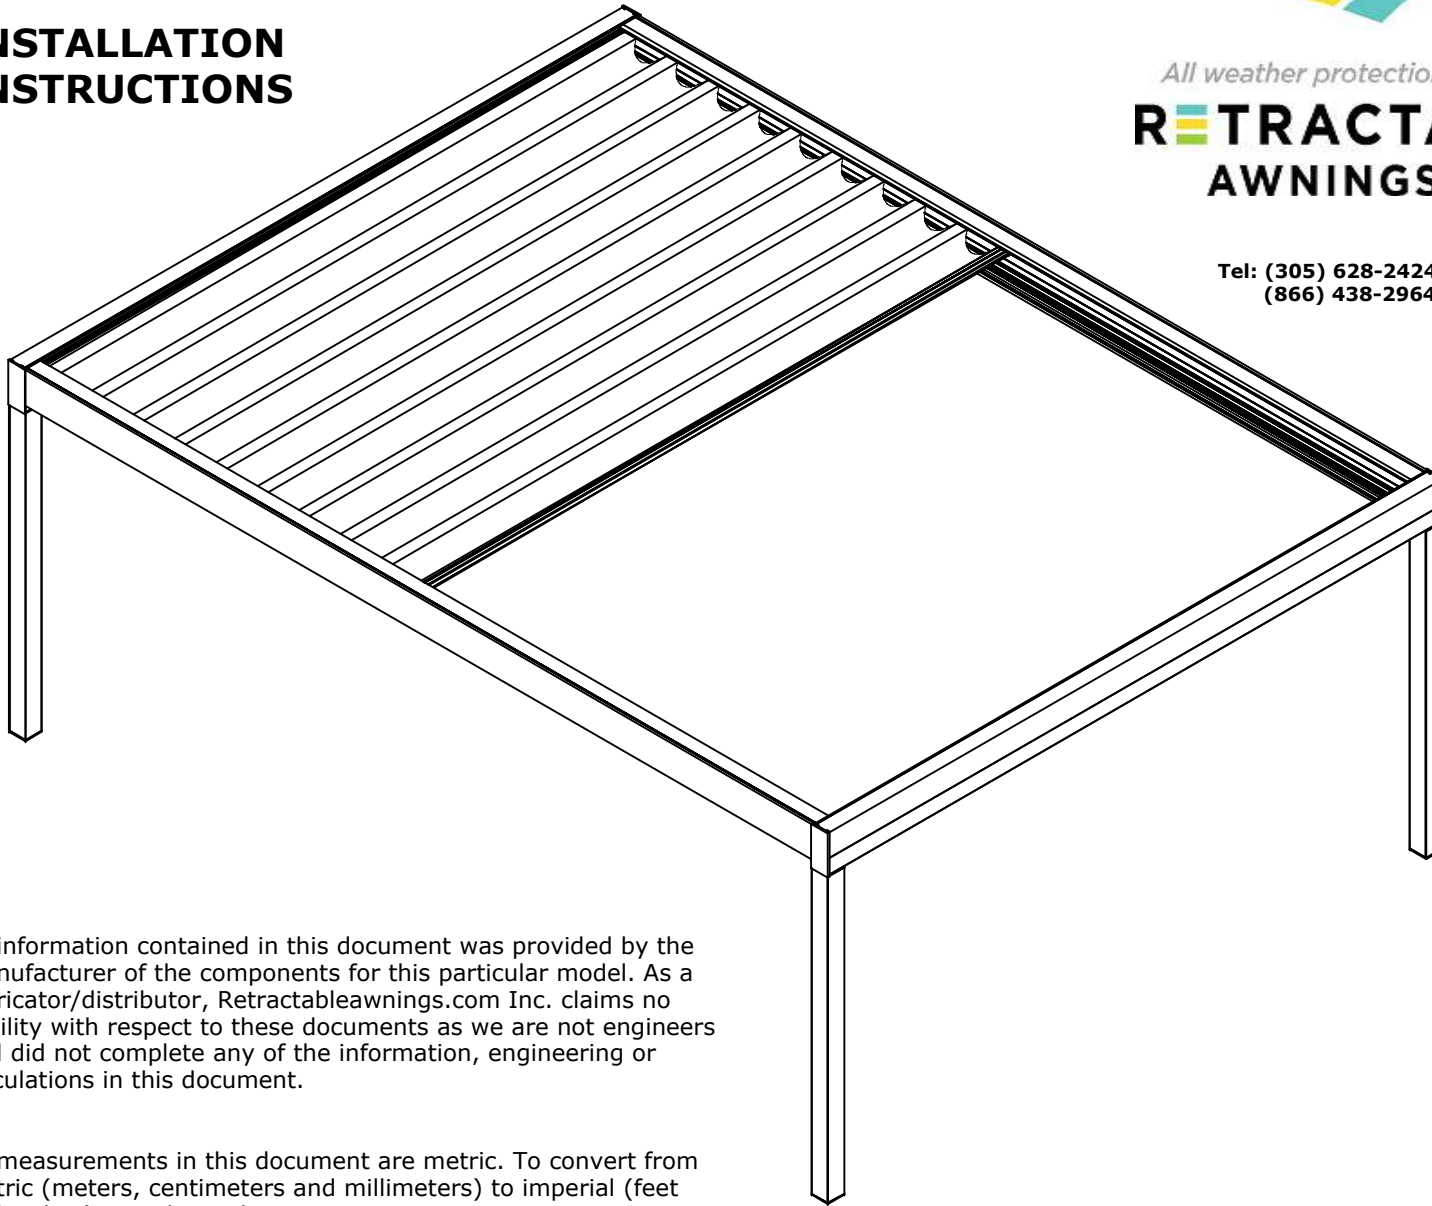


All information contained in this document was provided by the manufacturer of the components for this particular model. As a fabricator/distributor, Retractableawnings.com Inc. claims no liability with respect to these documents as we are not engineers and did not complete any of the information, engineering or calculations in this document.


All measurements in this document are metric. To convert from metric (meters, centimeters and millimeters) to imperial (feet and inches) visit this website:
http://www.onlineconversion.com/length_common.htm

Installation GUTTER

STEP I
MOTOR SIDE



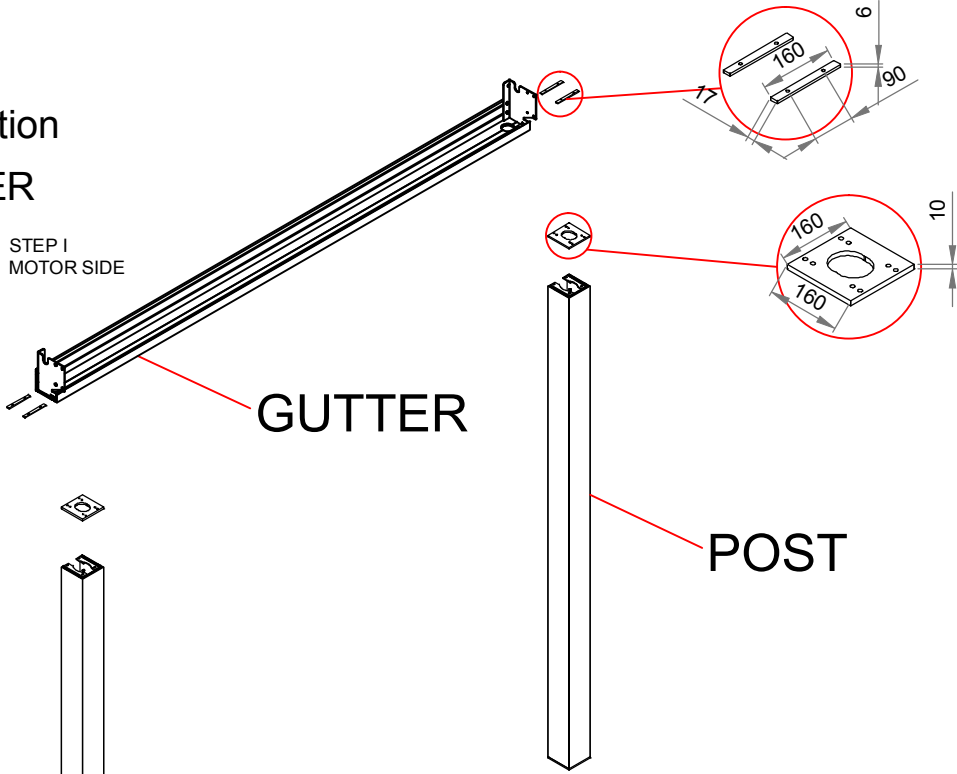


DIN 933
M8 x 25

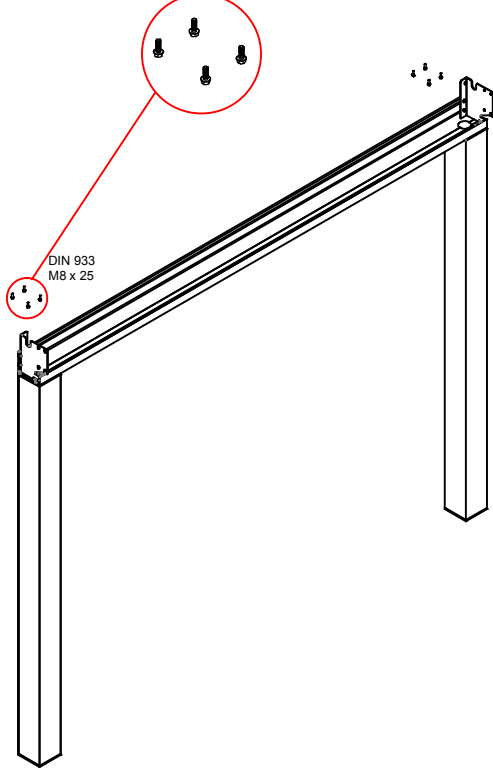


Installation GUTTER

STEP II
FRONT SIDE

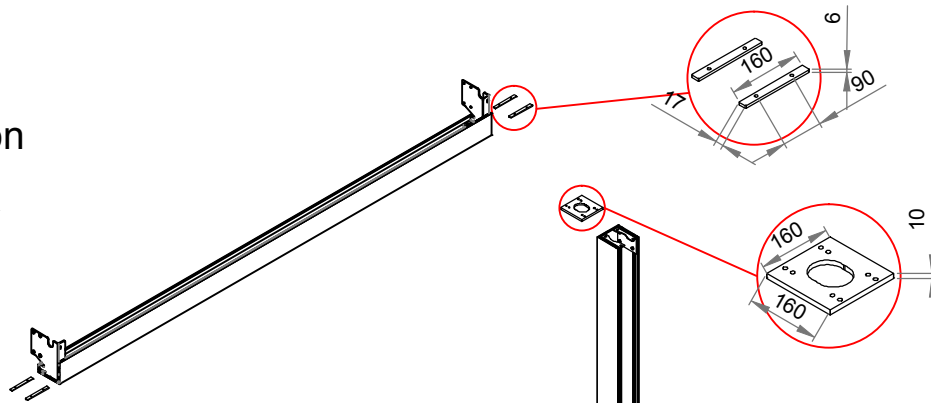


DIN 933
M8 x 25

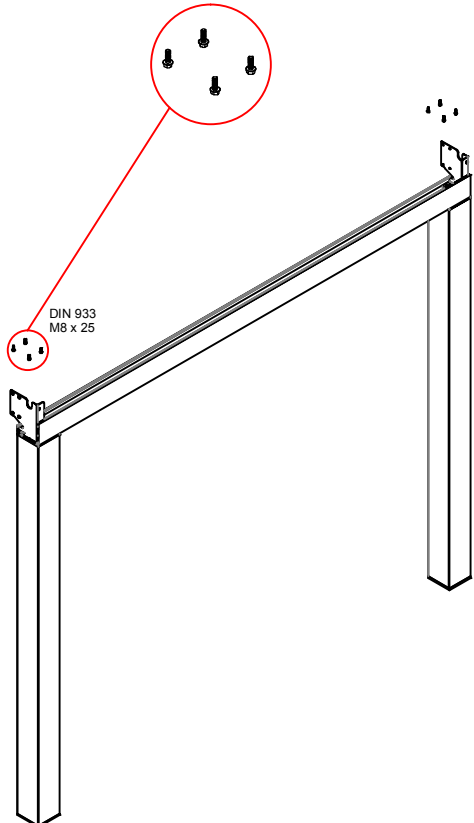


Installation
RAFTER SIDE GUTTER

STEP III

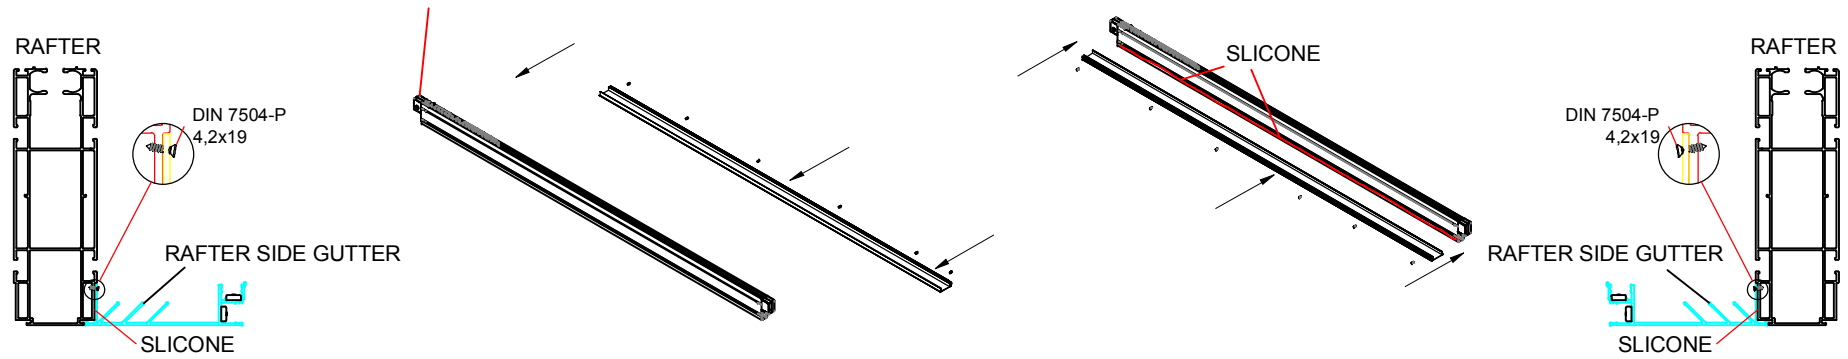


Installation
RAFTER

STEP IV

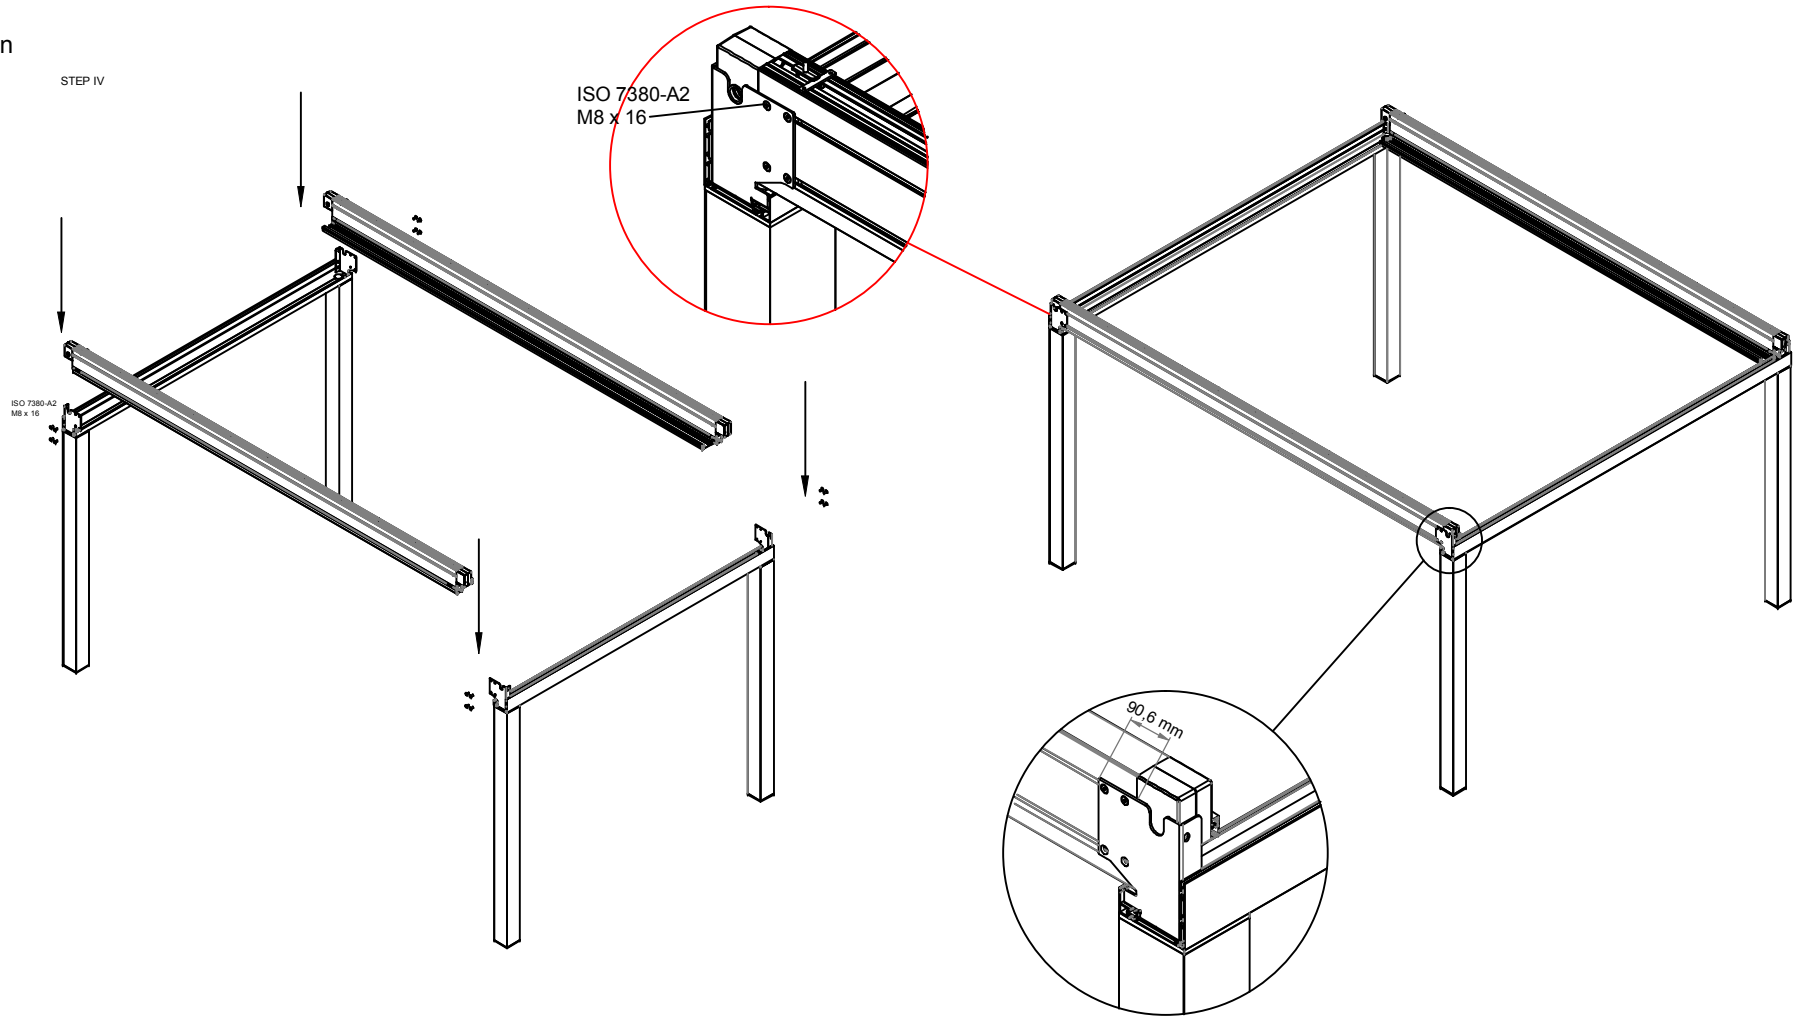




Installation
MOTOR BOX

STEP V

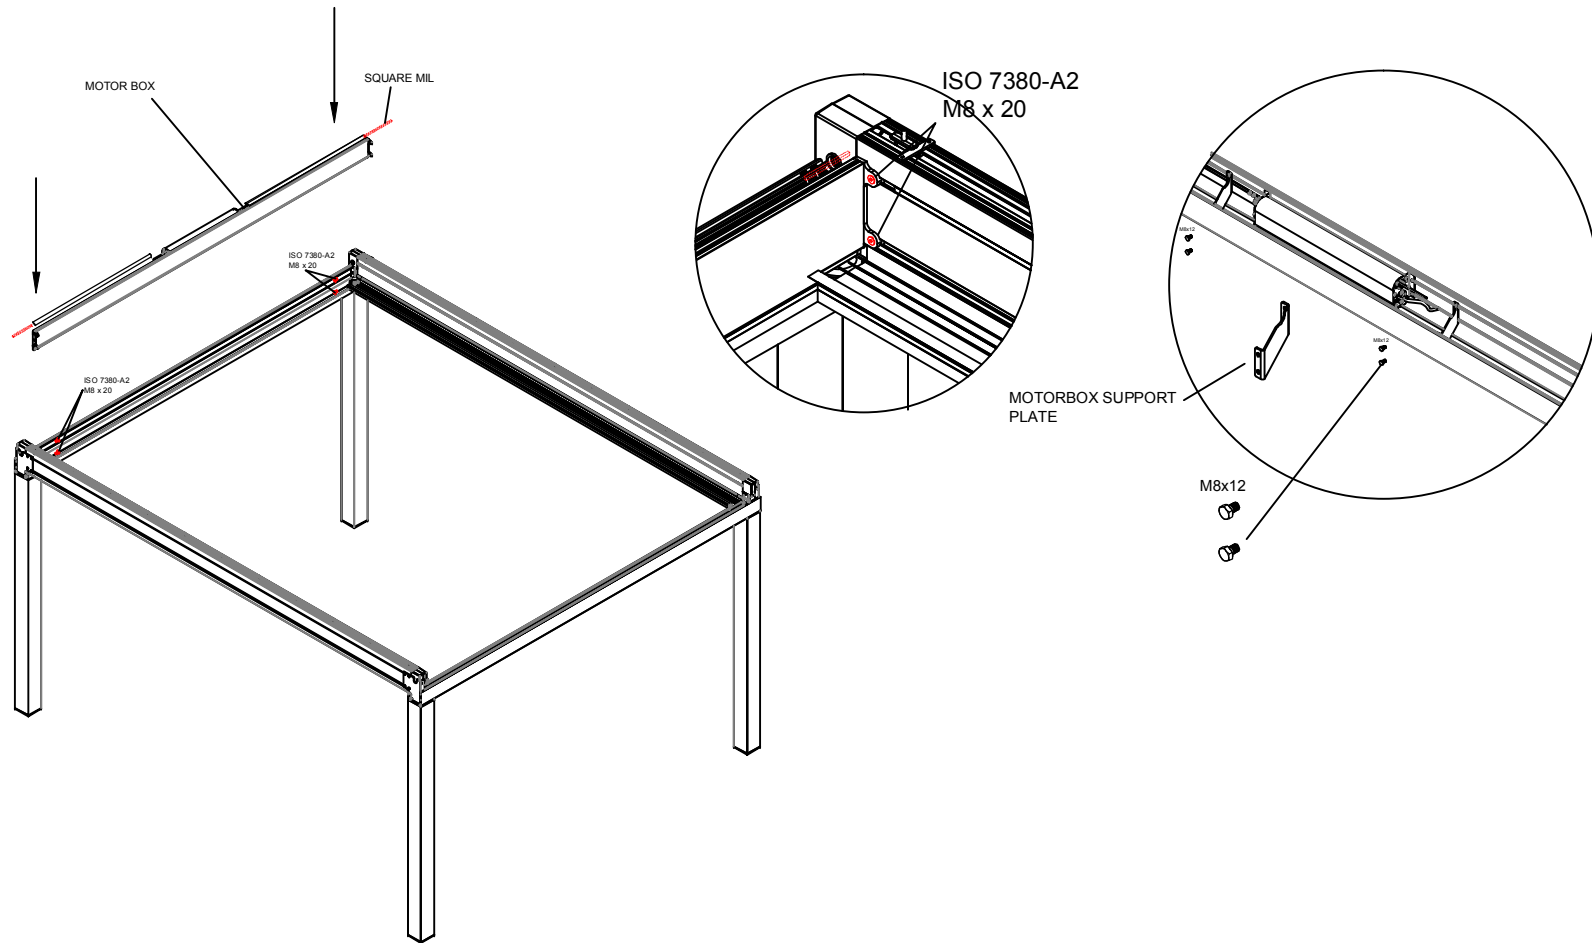


Installation
TOP COVER

STEP VI

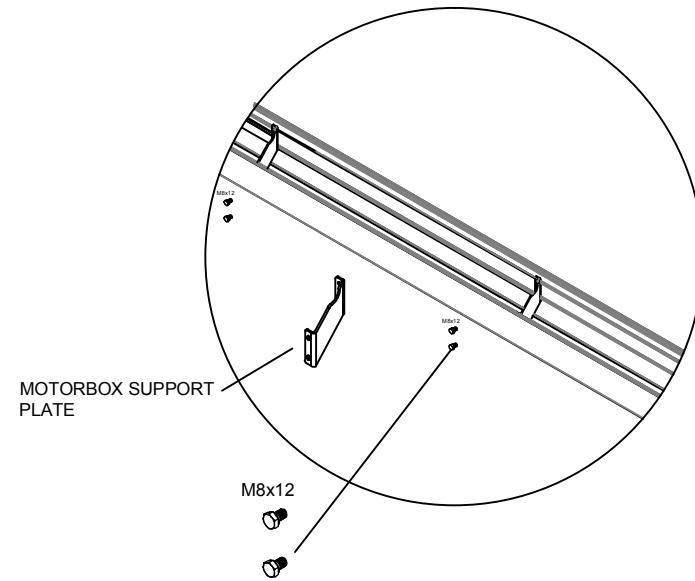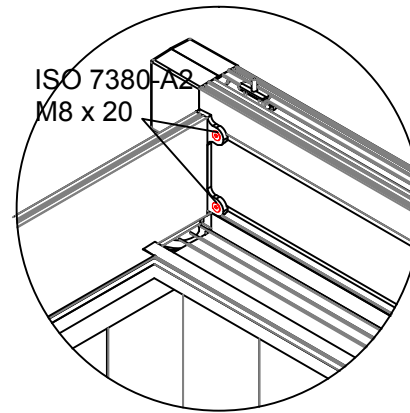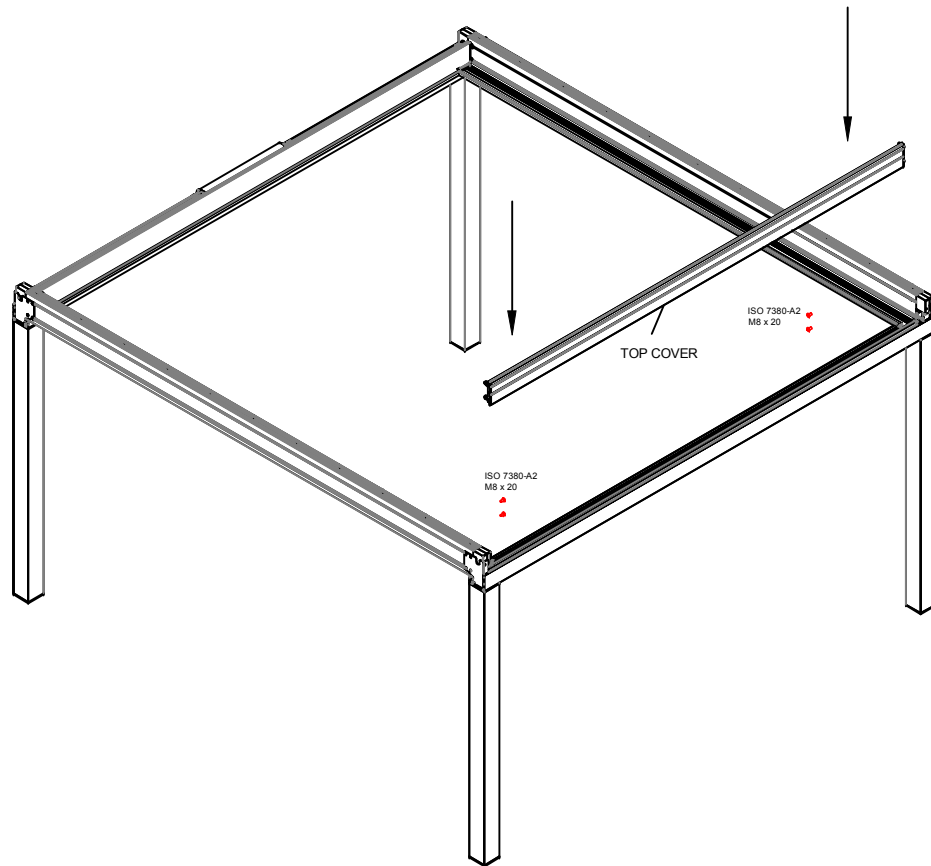


Installation
TOP COVER

STEP VII

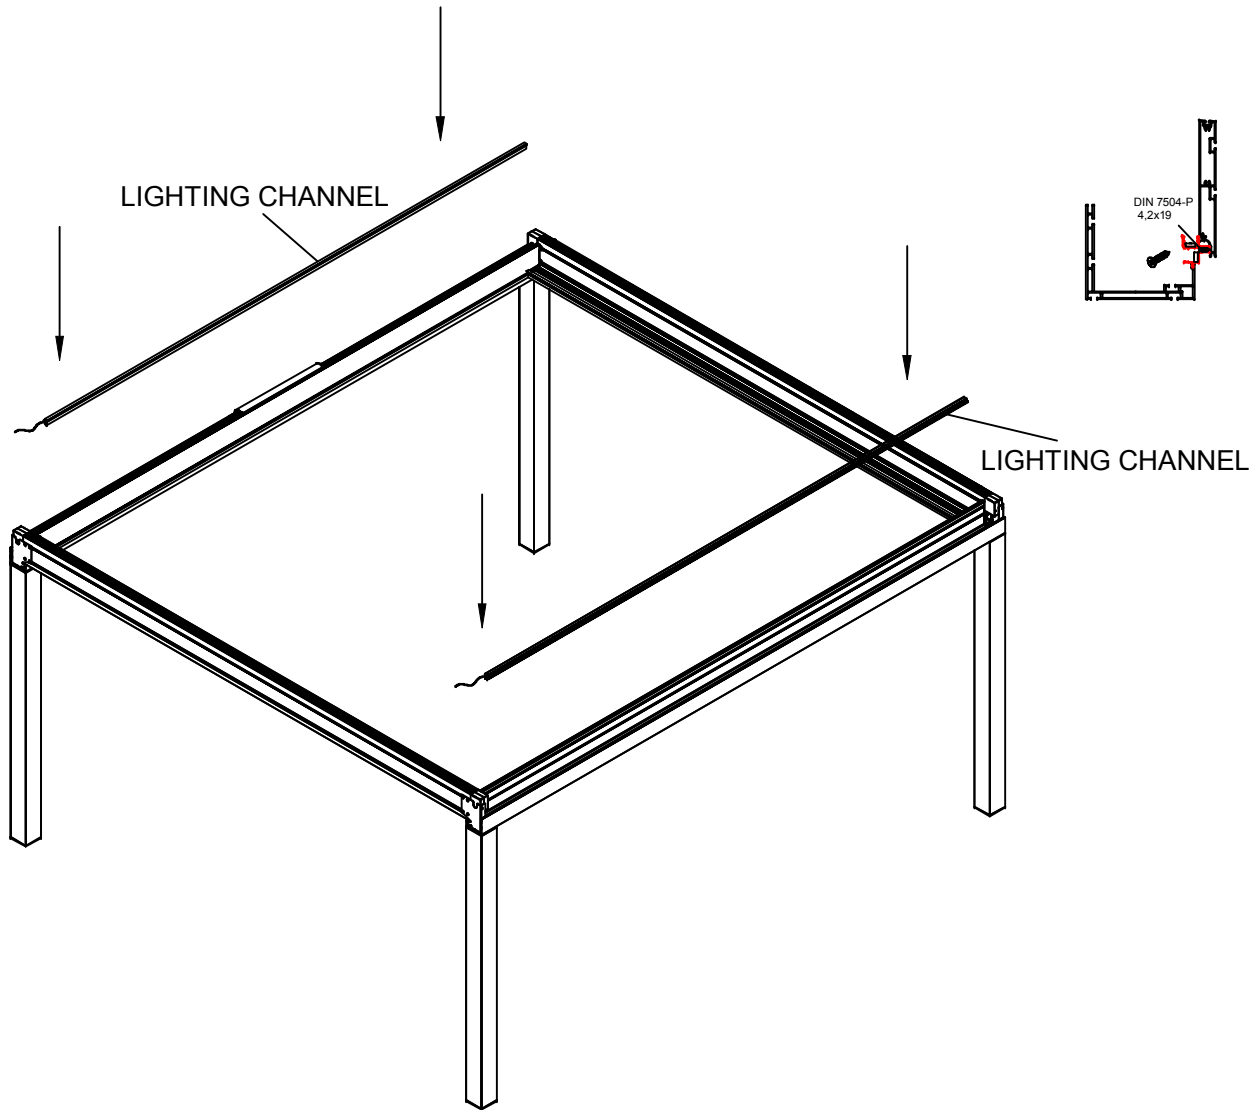


Installation

STEP VIII
Installation of fabric

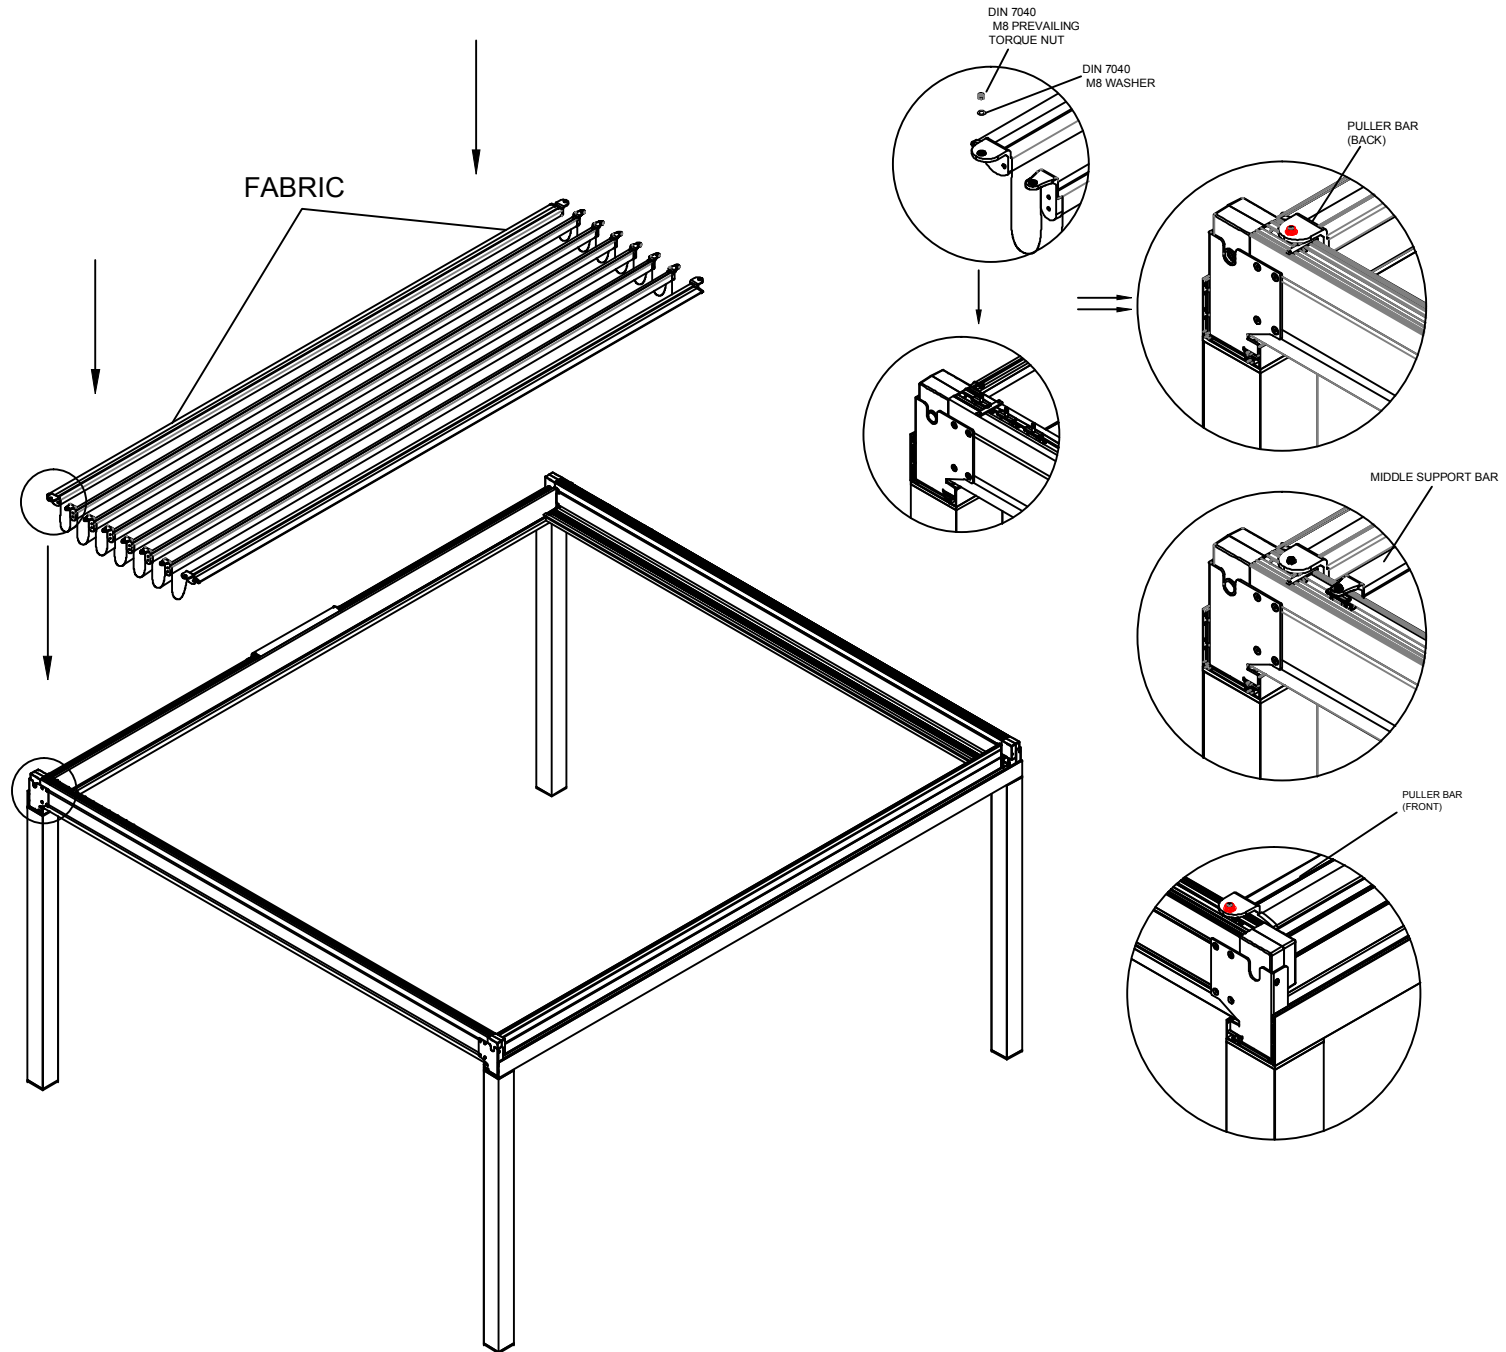

Installation
RAFTER TOP CAP



STEP IX

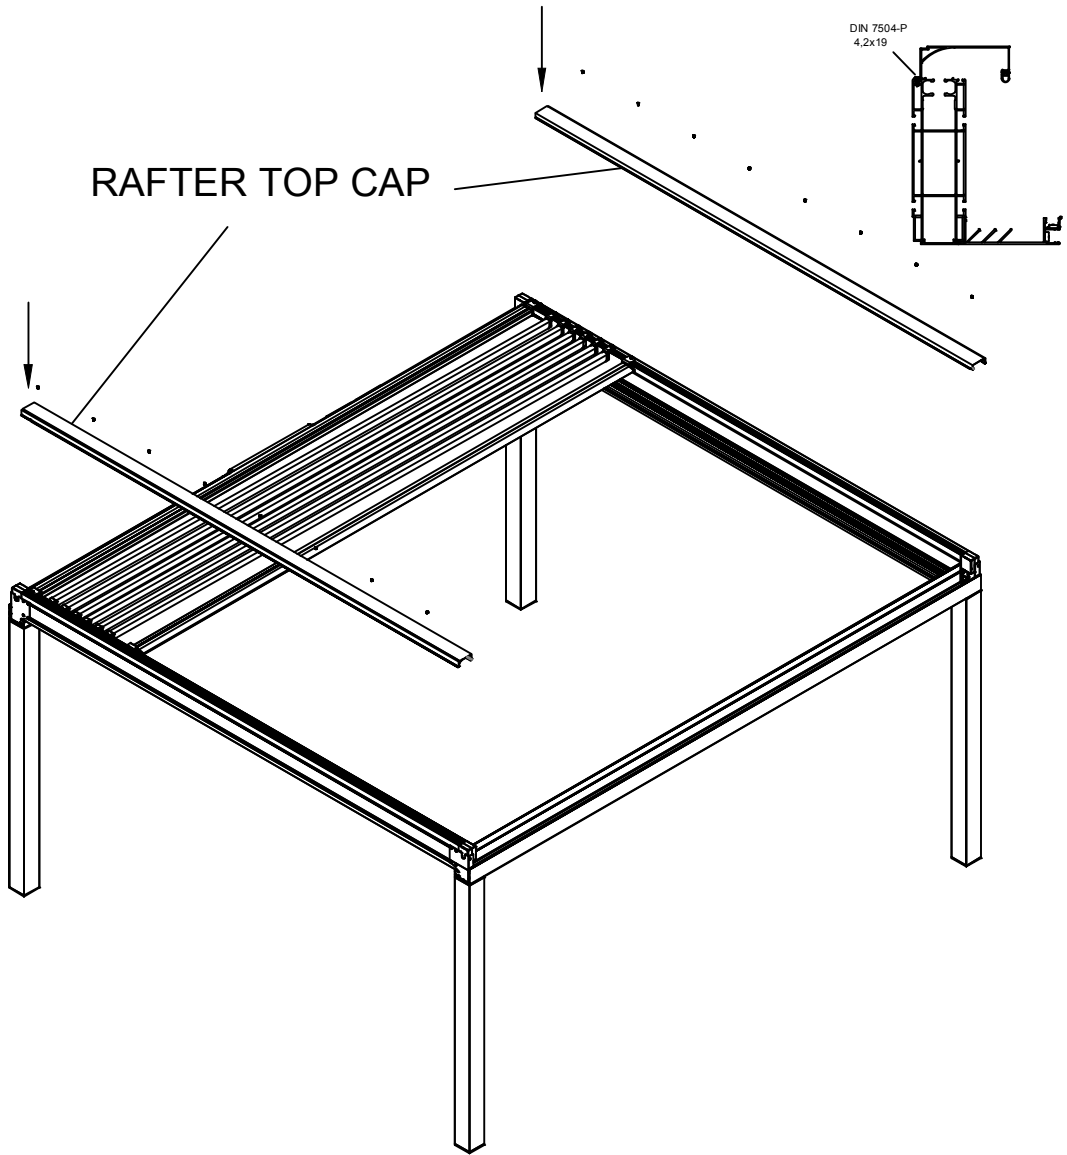

Installation
RAFTER SIDE COVER


STEP X

DIN 7504-P
4,2x19

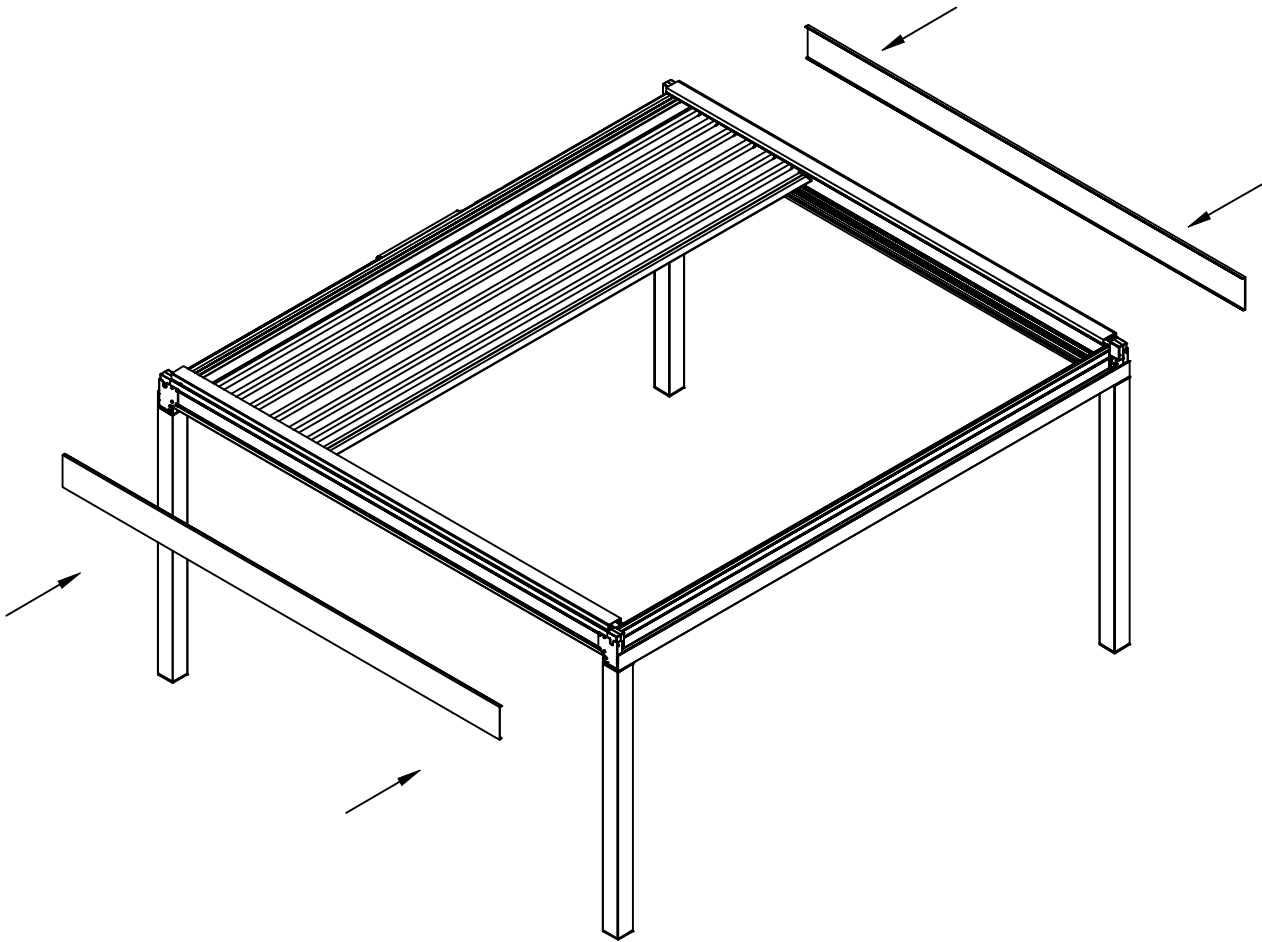


Installation
GUTTER CAP

STEP XI

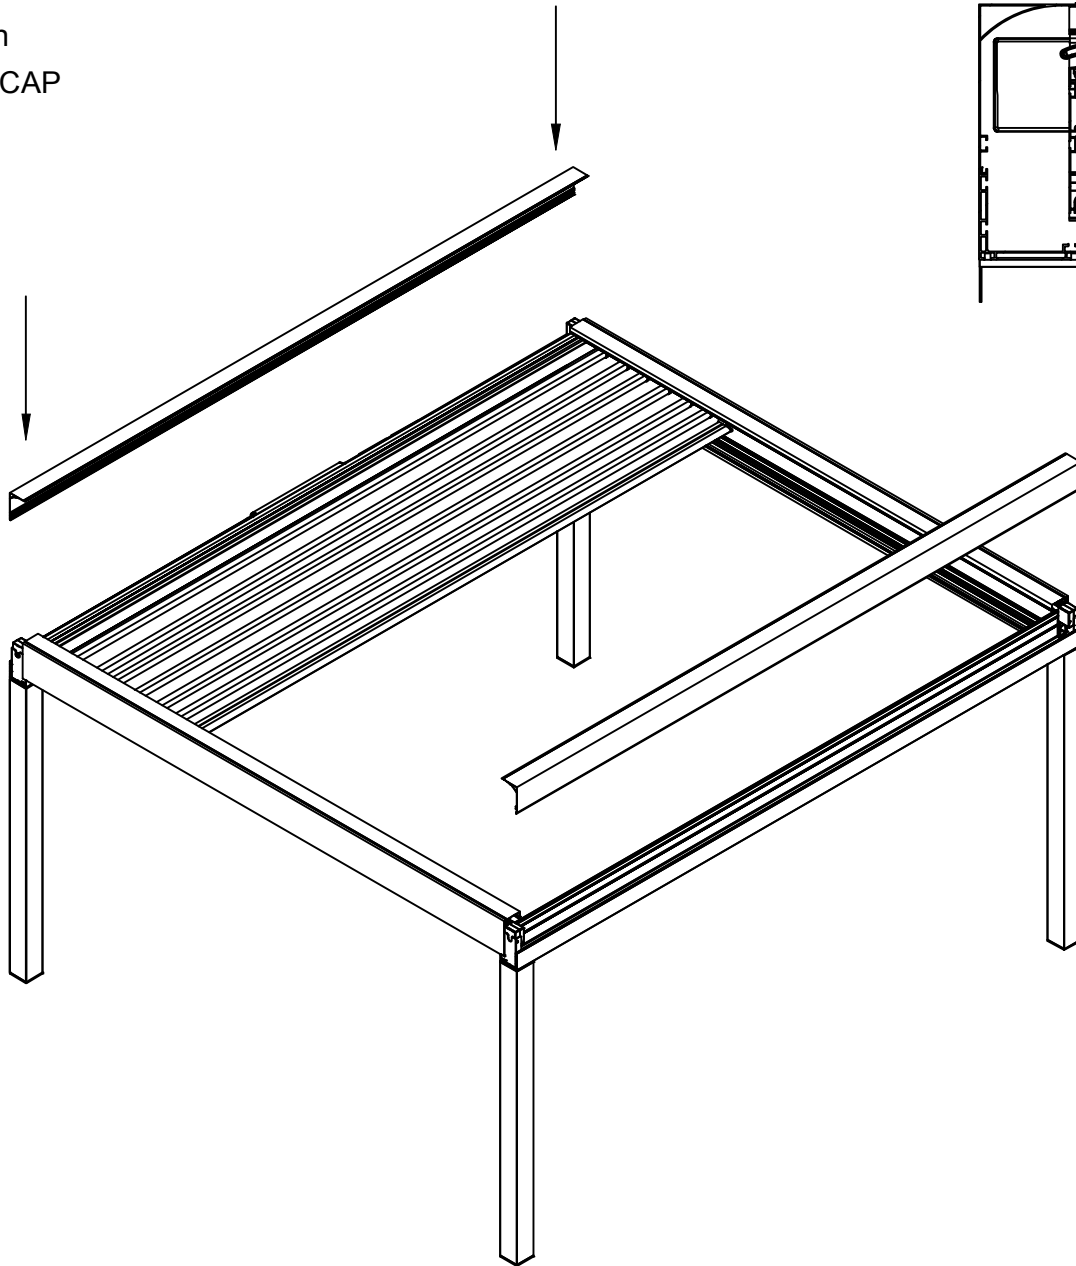


DIN 7504-P
4.2x19




Installation
RAFTER END CAP

STEP XII

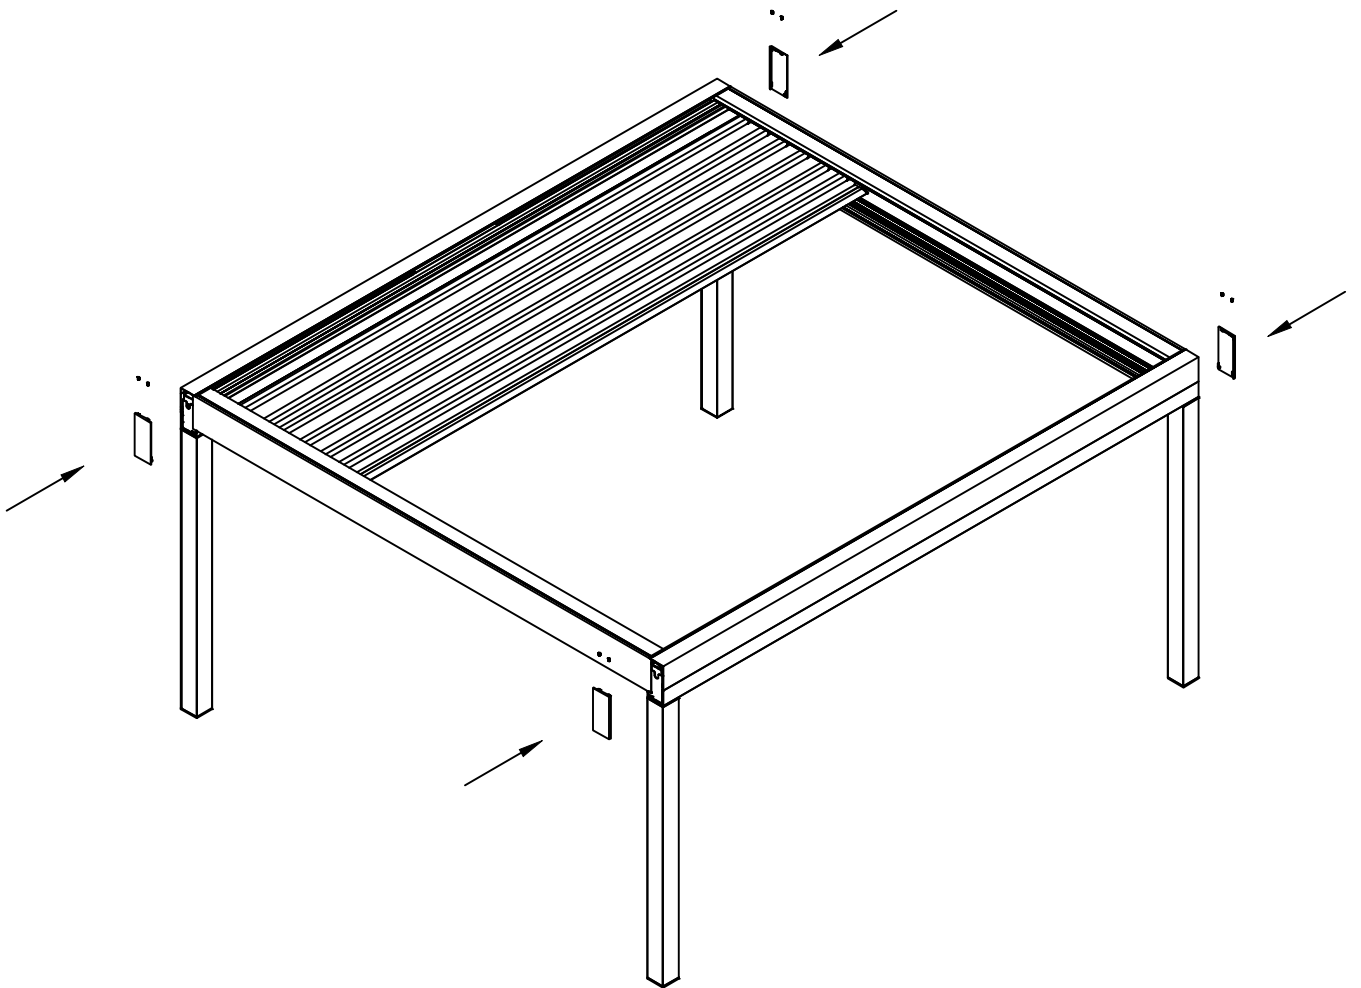


Installation


STEP XIII

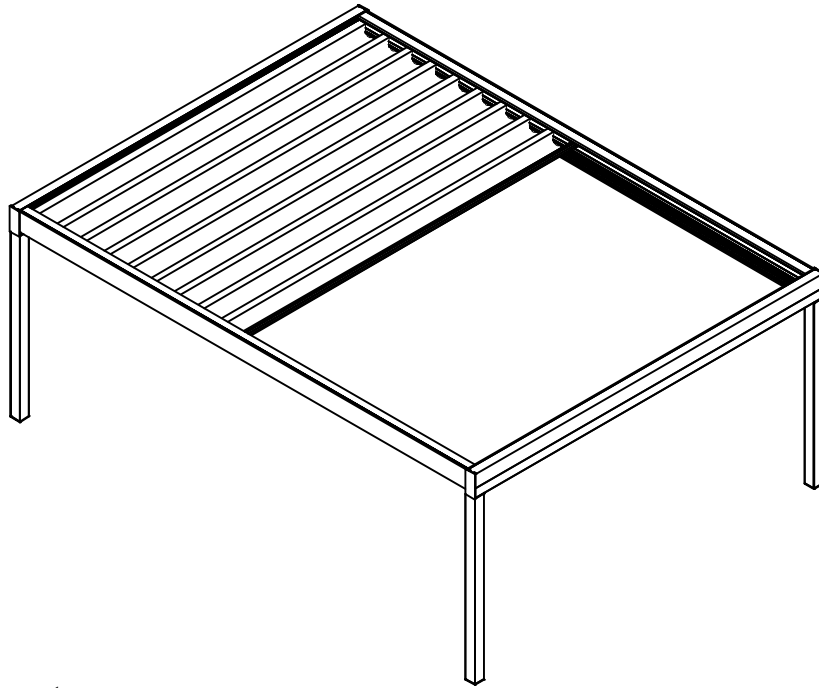

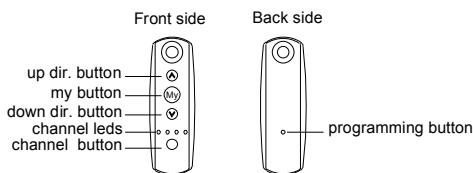

Programming RTS Somfy motor




Step1:
Connect the motorbox to 220 AC power
-Blue : Ntr
-Brown:Phase
-Green-Yellow:Ground


Step2:
 Check the channel for programming motor. Pres the channel button to select the channel 1 , make the channel 1 led light flashing.


Step3:
 Press the up and down button at same instance motor will give a click.(this means motor and remote control unit is introduced to each other.


Step4:
 Press the up button to check the direction of movement.If the fabric moves to up direction go on to step 6, if no go on to step 5.


Step5:
 Press the My button until the motorbox gives a click.The direction is reversed


Step6:
 Move the fabric to back limit position that the fabric is totally gathered under the front top cover support profile.

Step7:
 Press the My button & Down Dir. Button at the same instance for once the fabric will start to move down direction.And stop the movement with My button approx. 5 cm before the front en limit.


Step8:
 Press the down dir. button will small time intervals until the fabric is fully tensioned.

Step9:
 Press the My button & Up Dir. Button at the same instance for once the fabric will start to move up direction.And will stop itself at back limit position.

Step10:
 Stay pressing the My button until the motor will give click movement.

Step11:
 Press the programming button once. The programming is finished.

WHITE

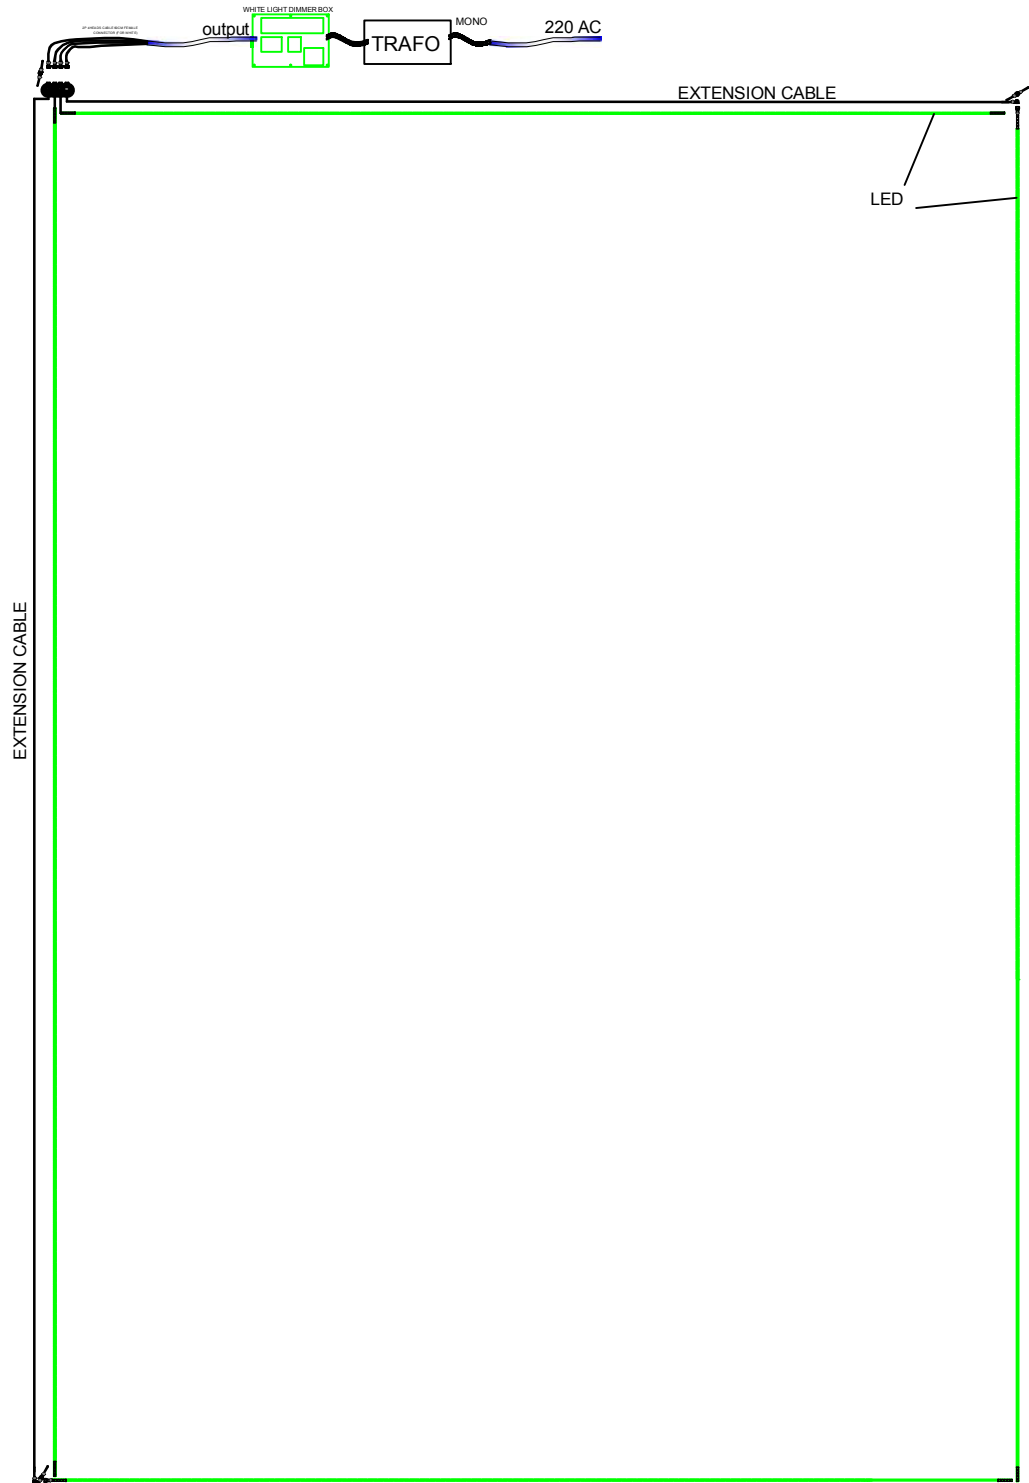

RGB

