

Bursa

Specifications, technical details
and order form




All weather protection systems!

RETRACTABLE
AWNINGS.COM

Toll free USA/Canada (866) Get-Awnings or
(866) 438-2964


Rest of the world (305) 628-2424

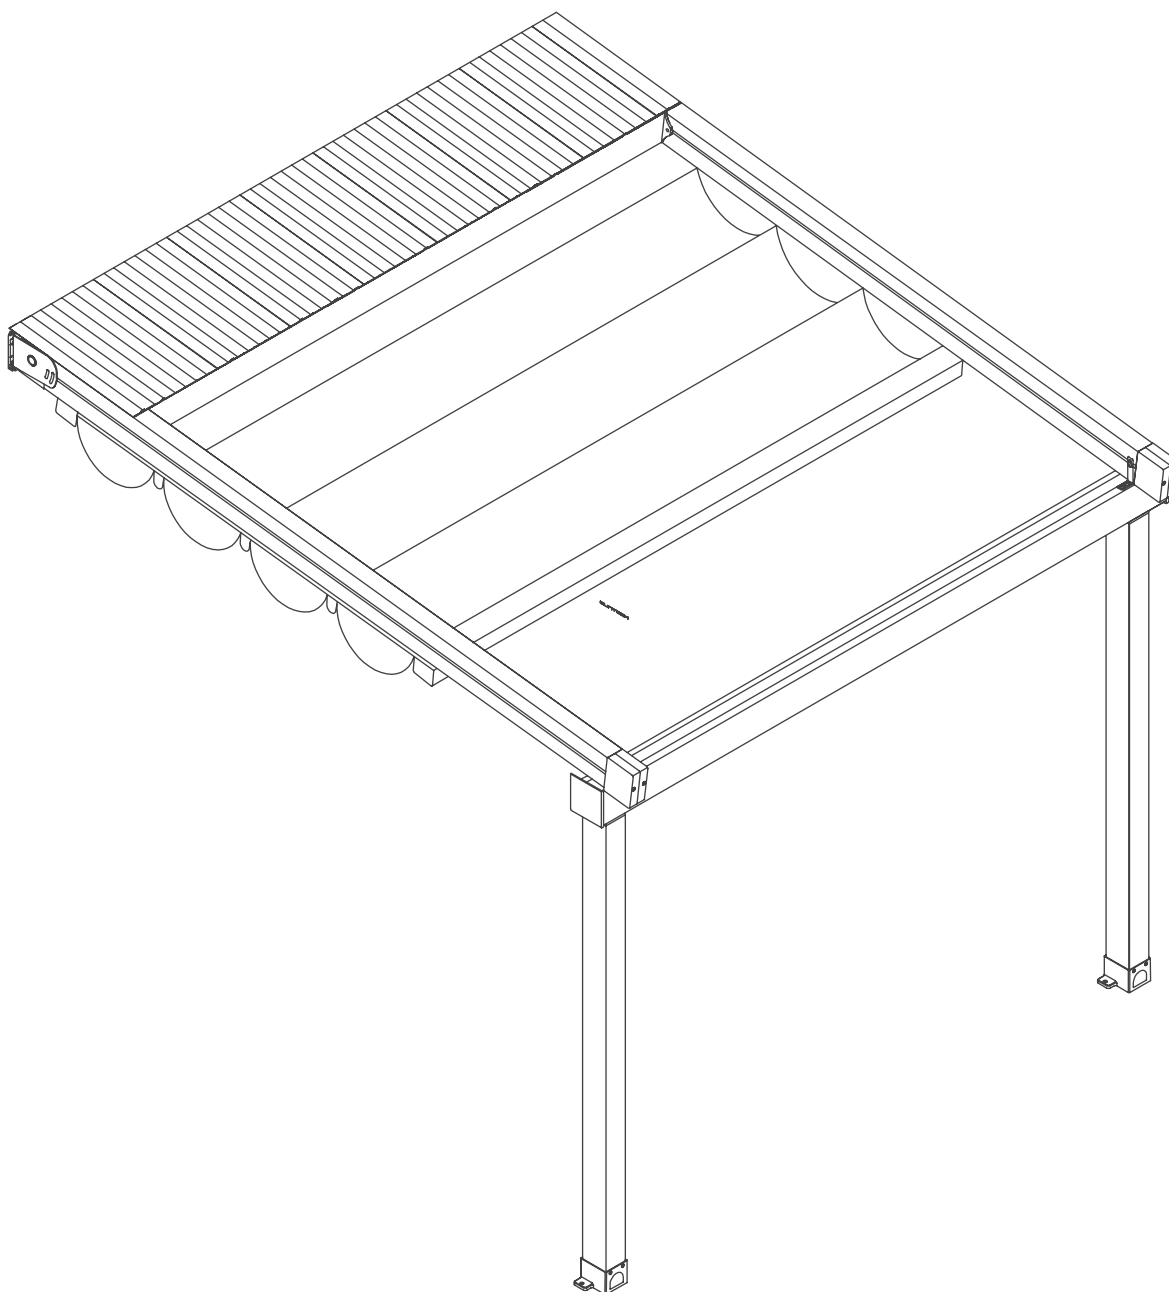

Bursa


One Module

200 cm > 450 cm
One Module with one motor & 2 rafters

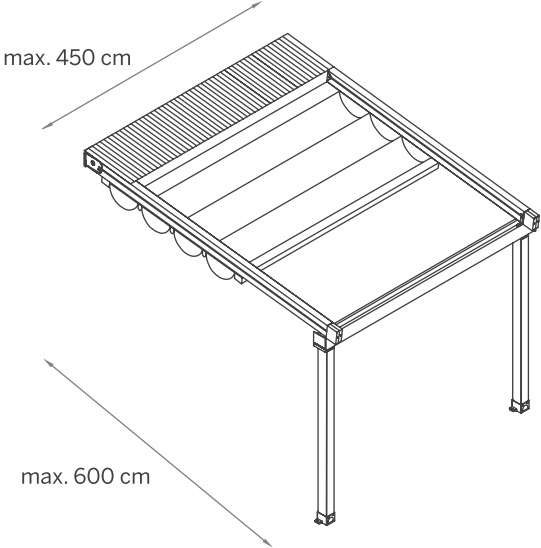

Two Modules

450 cm > 900 cm
Two Modules with one motor & 3 rafters

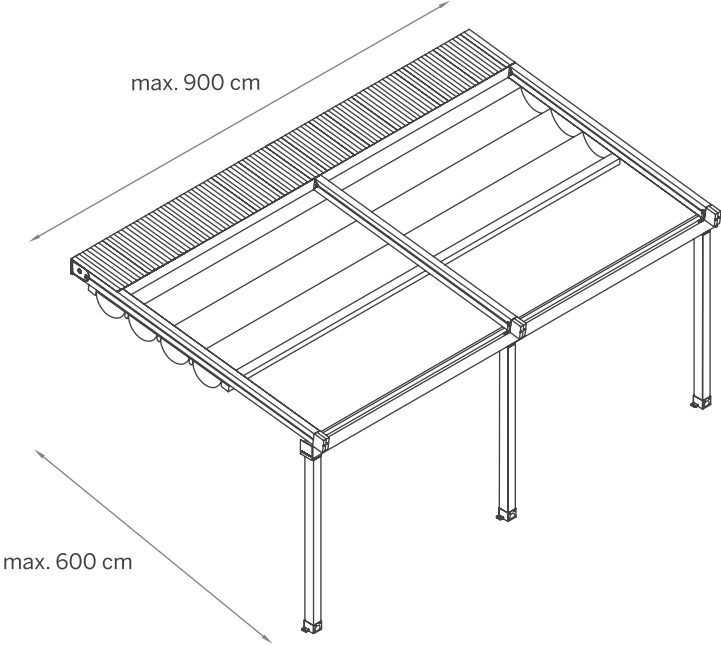


Bursa



Three Modules

900 cm > 1300 cm


Three Modules with one motor & 4 rafters

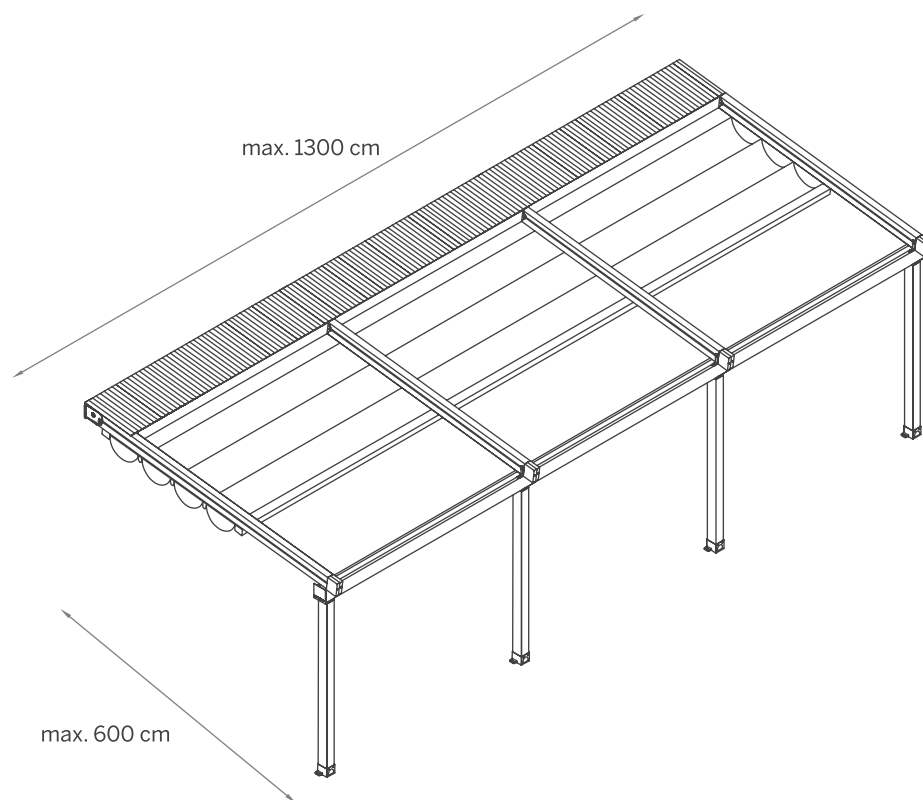


Bursa

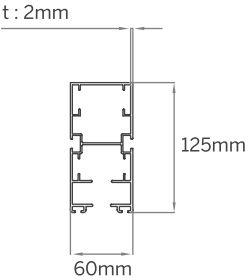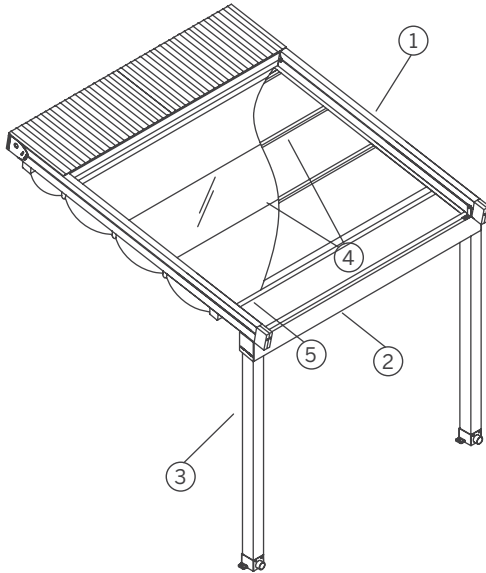


① Rafter




② Gutter




③ Post



④ Fabric Support (Standart)




④ Fabric Support (HDD Lux)



⑤ Puller Profile

Bursa

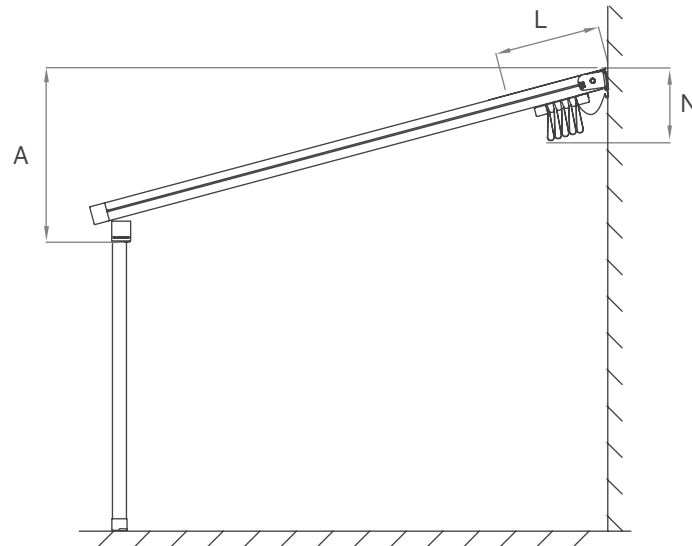


Bursa


	Fabric Height	Hood	Fall	Fab.Sup.Profiles
	(N*) mm	(L*) mm	(A*,**) mm	pc*
300	417	672	625	7
350	409	811	685	9
400	424	881	745	10
450	437	950	805	11
500	449	1020	865	12
550	461	1089	929	13
600	472	1159	990	14

* With min. inclination of 7°. Values can vary by other inclination values.



Bursa




Type - A








Type - B

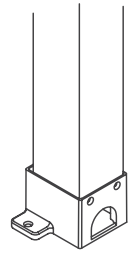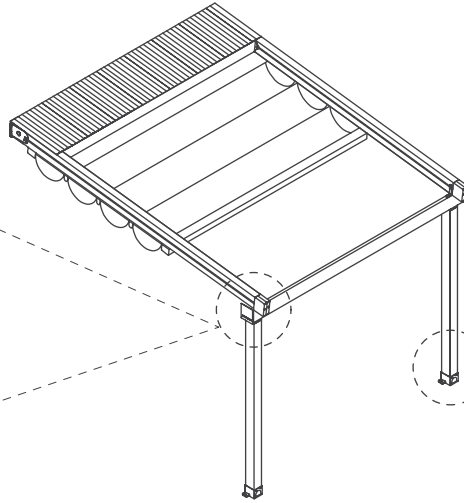


Type - A




Type - B

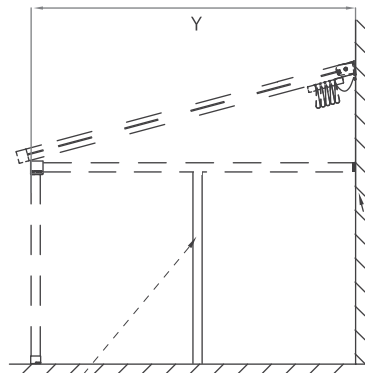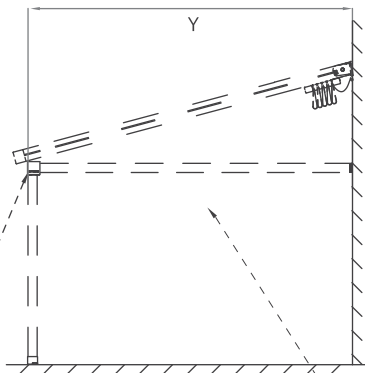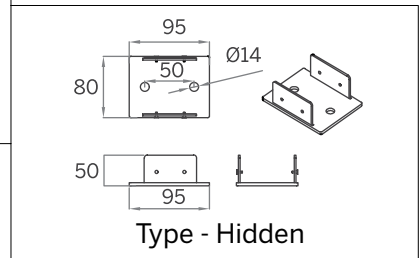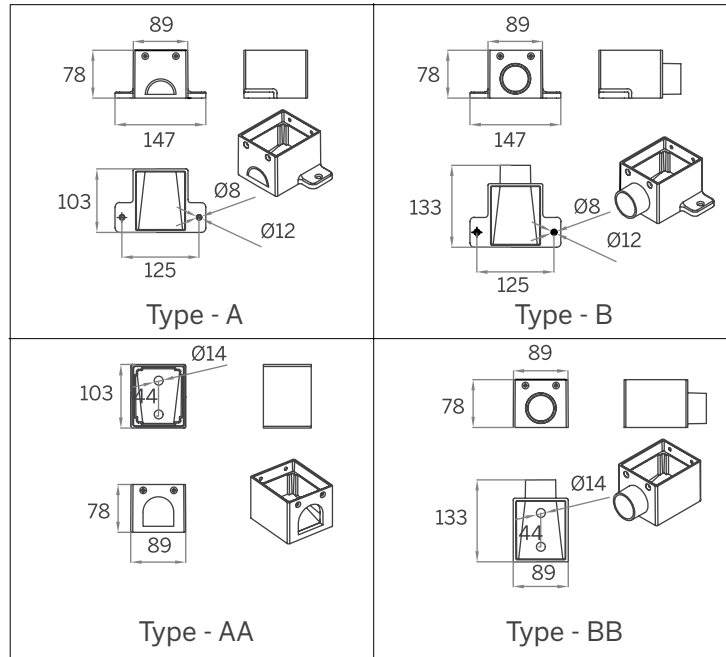

Gutter Connection



Side Rafter





Support Column of Side Rafter




Wall Connection


Bursa

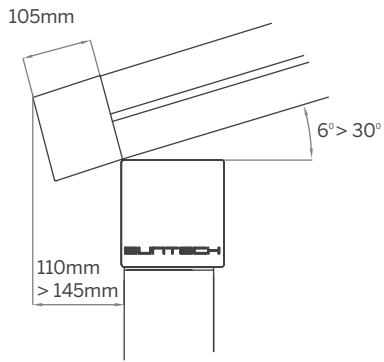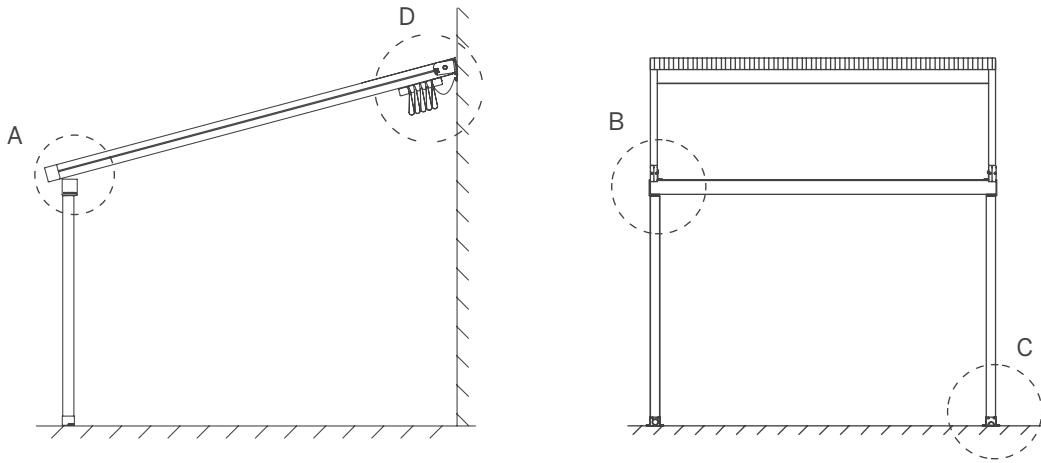


DETAIL A




DETAIL B



DETAIL C

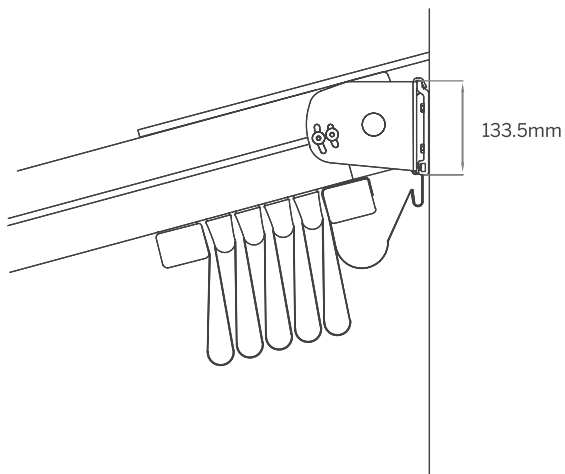


DETAIL D

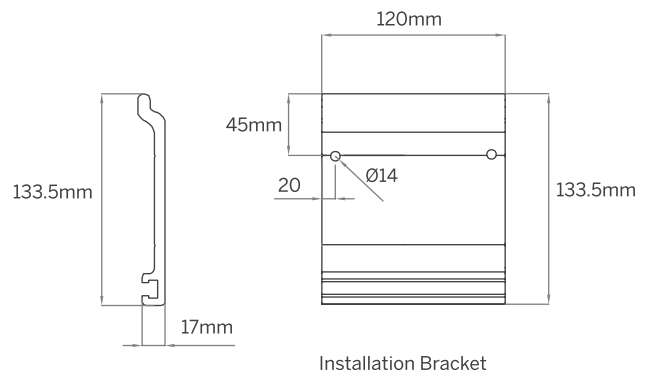


Installation Bracket

Bursa




F2 Four wheel slider

Four vertical rollers working together for perfectly smooth operation every time. The F2 four wheel system is proven to remove the jamming issue and can take loads of upto 600KG.

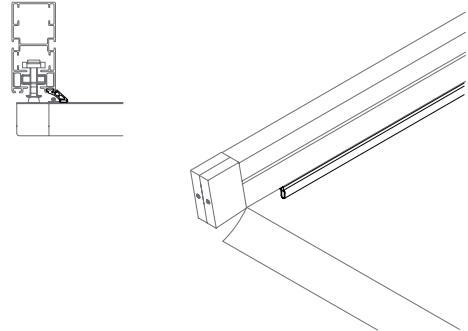


Rafter stormguard edge seal

The rafter Stormguard edge seal stops water from dripping over the side of the system by providing a soft cushioning barrier along the side of the system.

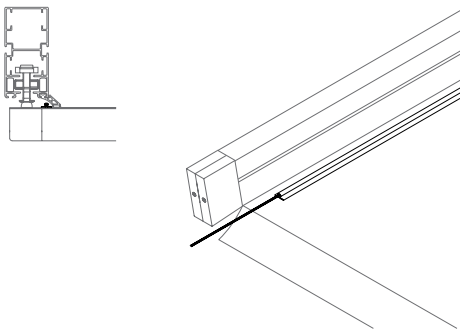

Fabric anti-drop edge cord with electrical cable


The fabric anti-drip edge cord with integrated lighting electrical cable works in conjunction with the Stormguard edge seal to prevent any water leaks over the side of the system.

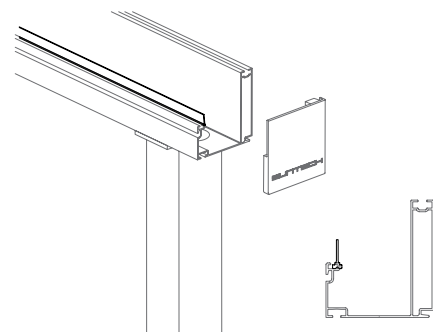

Gutter stormguard seal


The Stormguard gutter seal provides a perfect seal to prevent water leaks along the front of the system from driving rain or splashing from the gutter.

Bursa

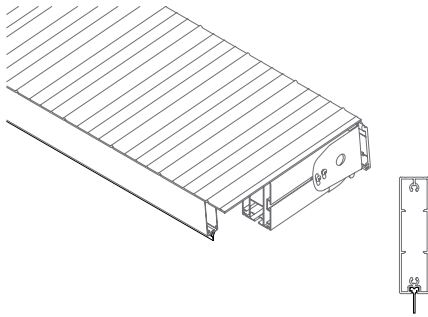


Hood stormguard seal

The Stormguard hood seal provides the perfect seal to prevent driving rain & wind coming in under the hood profiles.

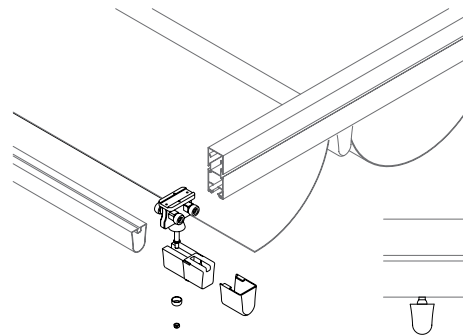


F2 slider and fabric profile assembly

The system has been designed for ease of assembly to save time on installations and reduce the number of staff required.

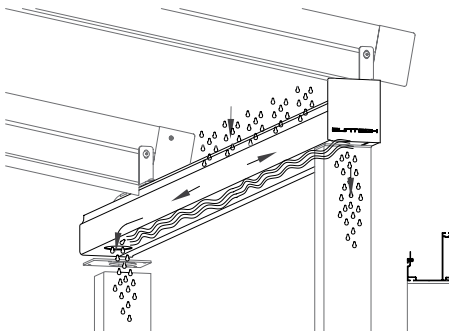

Integrated gutter & internal drainage system


The integrated gutter system provides the perfect solution for water drainage.

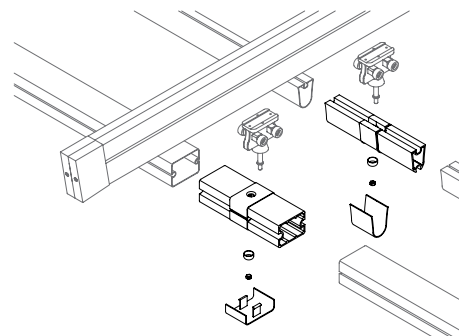

Easy clip intermediate joints (for 2 & 3 module systems)


The Easy clip intermediate joints have been designed for ease of site assembly to save time and reduce the number of staff required.

Bursa

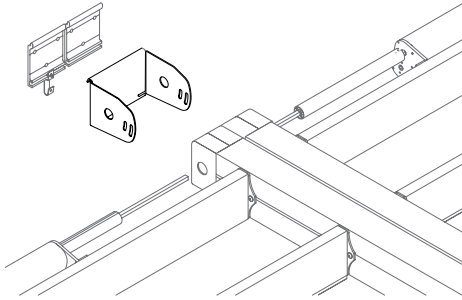


Double rafter wall bracket kit

An advanced solution for installing two rafter's at once.

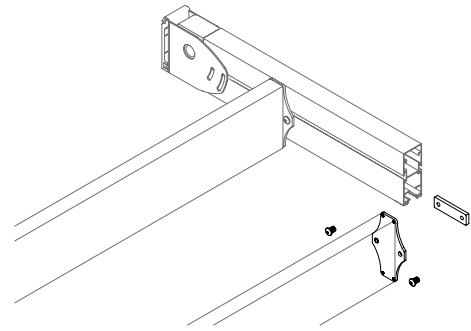


Motorbox support & hood support profile easy installation

Each support profile is easy to install and simple to adjust at the time of installation.

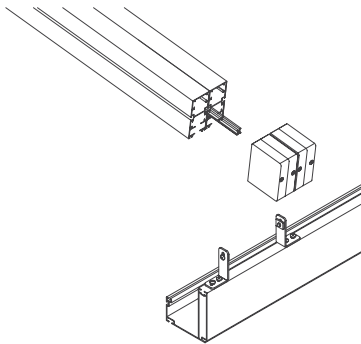

Storm channel for joining system


The storm channel is patented solution for joining two systems side by side with a waterproof join.

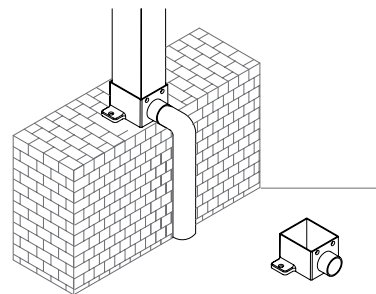

Base plate with external spout


This base plate provides a water dispersal solution.

Bursa




F2 slider easy clip installation

The F2 system has been designed for ease of use, to save time on installations and reduce the number of staff required. Each F2 slider can take loads of upto 600KG once in place.




Rafter profile with side channels for easy installation

The RetractableAwnings.com rafter profiles are designed with functional side channels for easy installation.

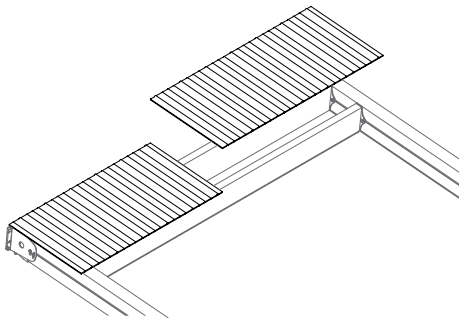

Hood profile sheets


RetractableAwnings.com hood profile sheets provide an attractive covering solution for the system when not in use. The low profile aesthetic design offers additional protection to the system with a chic touch.

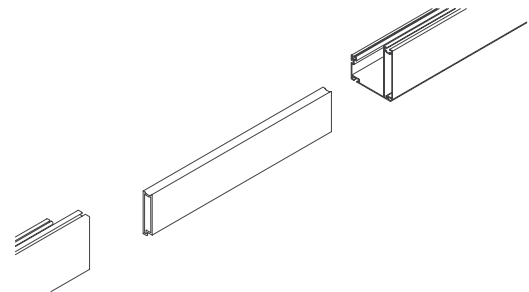

Gutter profile joining bar


A smart solution for joining the gutter profiles.

Bursa

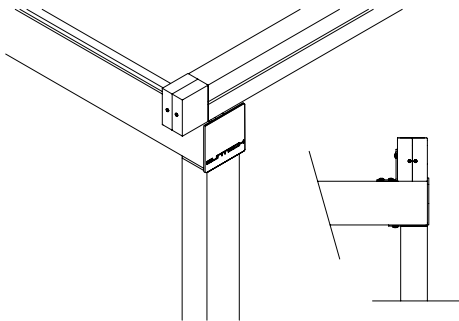


Gutter flush with rafter

Gutter solution when the system is installed next to a wall or no overhang of the gutter is required.




Compact 26rpm direct drive motor box

The RetractableAwnings.com direct drive motor system is a quick and efficient system that drives all conveyor rafters at the same time. The low profile design also allows the fabric to be stored underneath the motor which saves additional space.

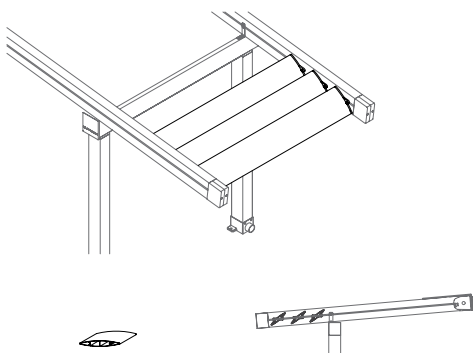

Aerofoil Louvres


The addition of Aerofoil louvres can provide added shade when the system is closed.

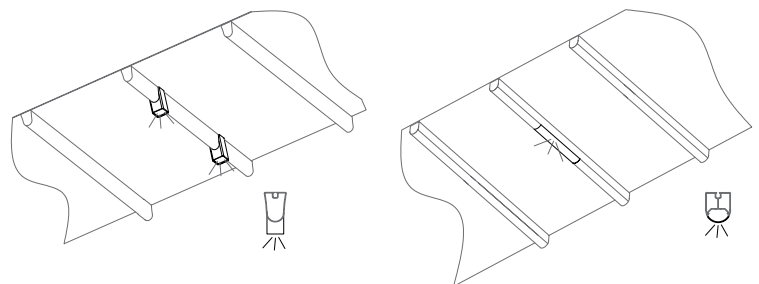

LED-TECH high powered lighting


LED-TECH lighting is an integrated lighting solution that can be added to any RetractableAwnings.com system.

Bursa

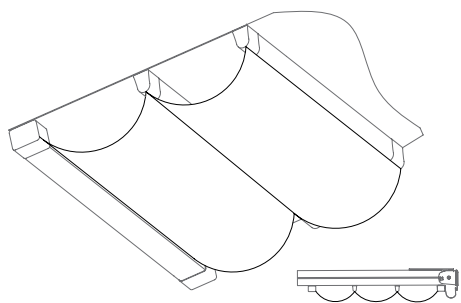

Decorative fabric under layer

The second decorative fabric under layer of fabric can provide an elegant touch of design.

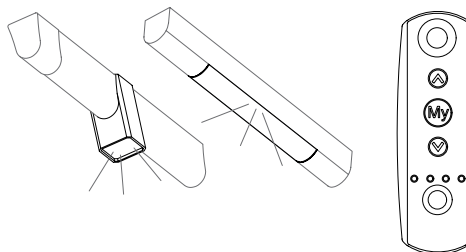


LED-TECH dimmer setup


LED-TECH dimmer lighting is an integrated lighting solution that can be added to any RetractableAwnings.com systems.

Bursa


type I

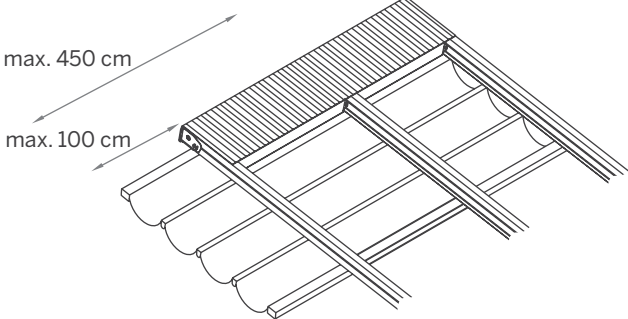




type II

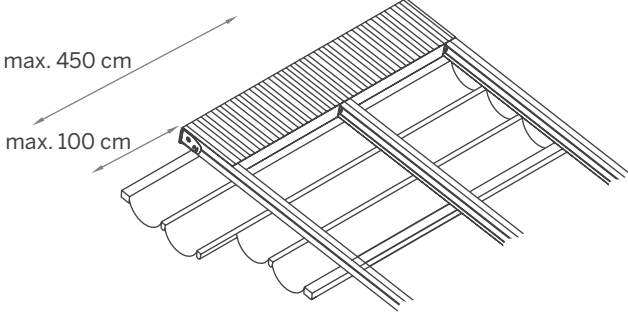

type III

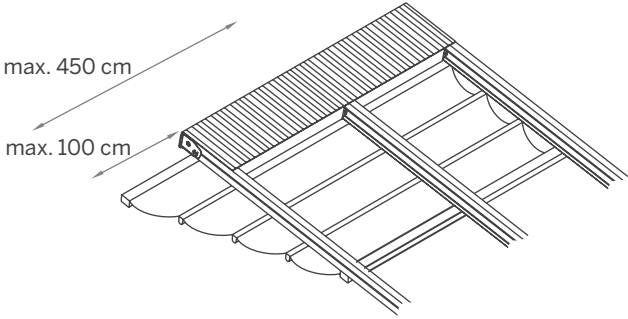

Bursa

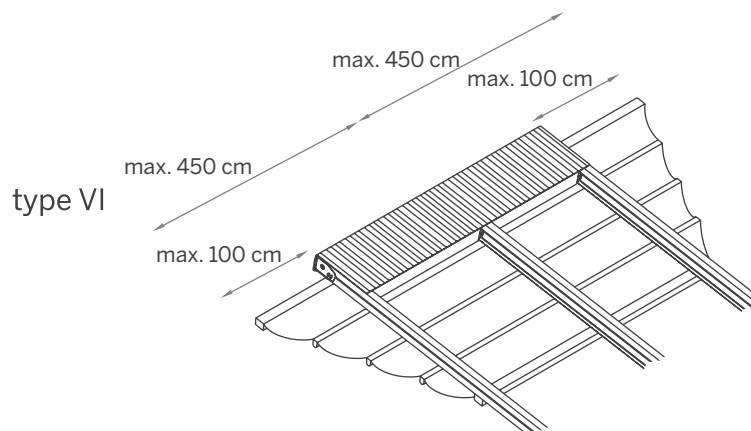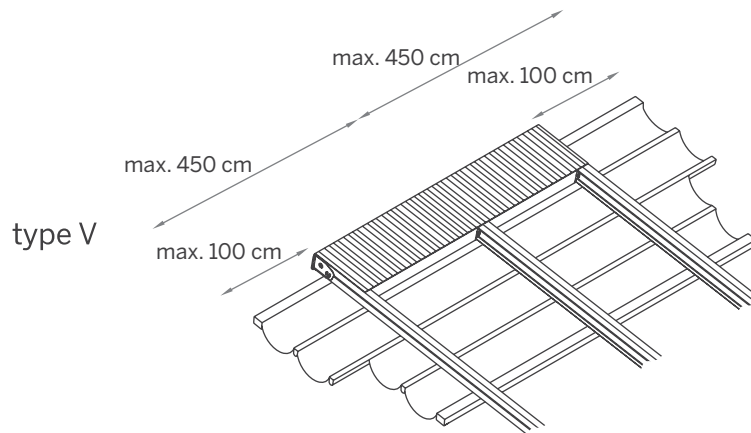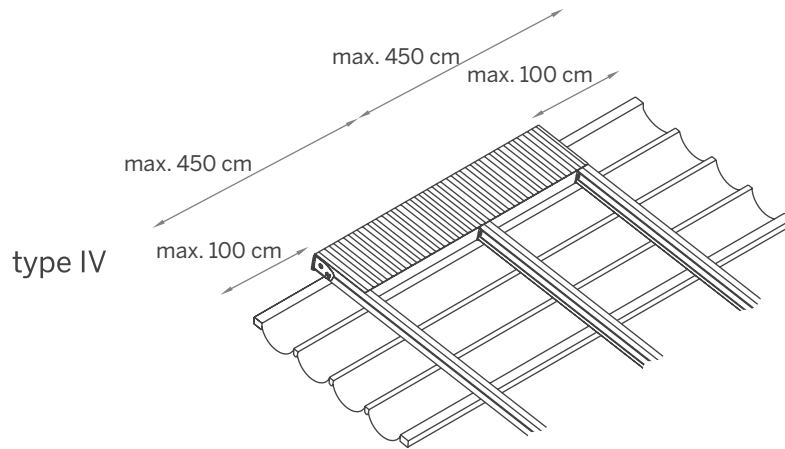


Each system is available with an optional overhang to allow the covered area to protrude past the rafter profile. Site specific overhang solutions such as stepped or wedge shapes are also an effective way to get maximum coverage for your areas.

Bursa


One Module

200 cm > 450 cm
One Module with one motor & 2 rafters

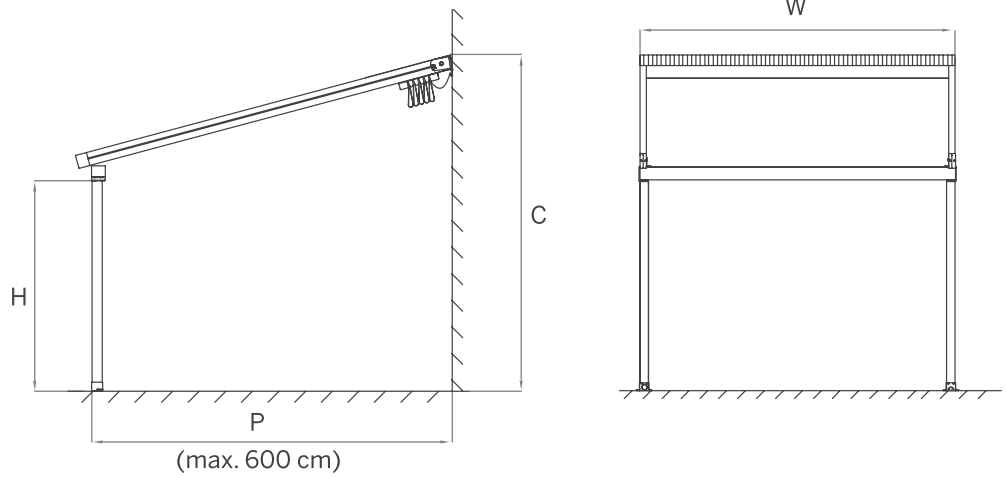


Two Modules

450 cm > 900 cm
Two Modules with one motor & 3 rafters

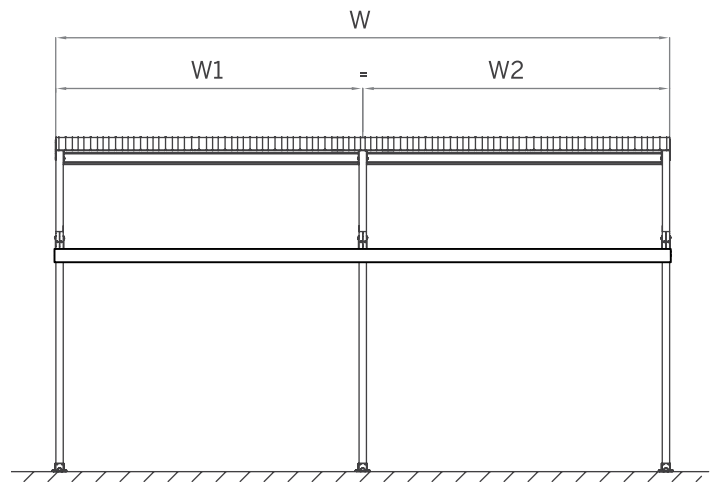

Three Modules

900 cm > 1300 cm
Three Modules with one motor & 4 rafters

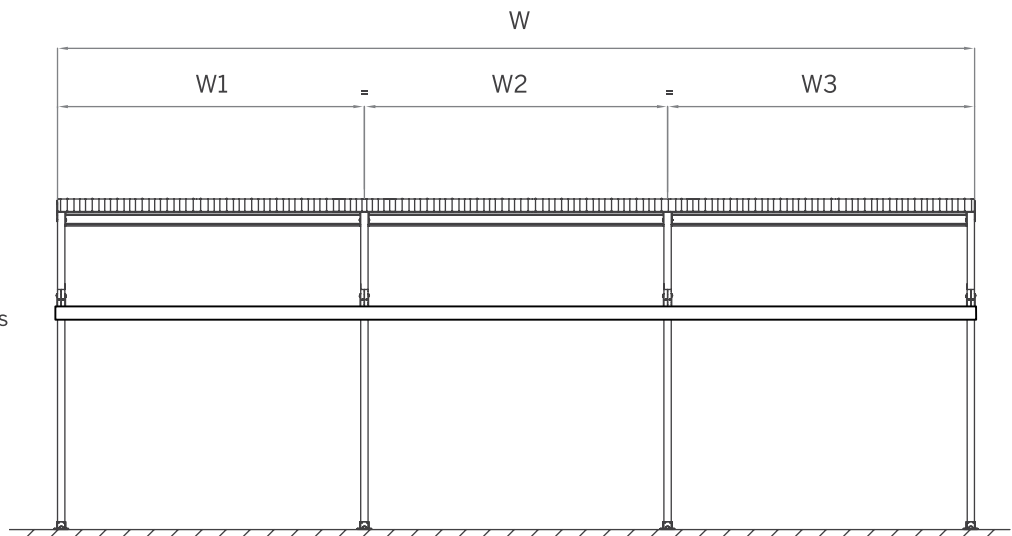

Name/Company Name:

Order Date:

Order Reference:

Quantity:

DIMENSIONS

W - Total Widthcm

P - Projection.....cm

C - Wall / Back Height.....cm

H - Front / Post Height.....cm

Total Number of Posts Required

(Maximum span between posts with gutter profile is 600cm)

If modules are multiple and each module is in different width, please provide details (max. width for single module is 450cm, double modules 900cm, triple modules 1300cm)

W 1cm

W 2cm

W 3cm

POWDERCOAT COLORS

RAL colors

Exclusive colors

Texture colors

RAL 9016

OGN35

ST9010

Other...

RAL 1013

OS561

ST9001

RAL 9006

OY395

ST1013

RAL 7006

OGN39

ST7039

RAL 7016

ON617

ST7016

RAL 9005

ON611

ST8019

FABRIC

Basic

Semi Transparent

WT785 / White

STRW22 / White

Other...

CR295 / Cream

STRB33 / Black

Xclusive

Matt

WTEX / White

MW23 / White

CRMX / Cream

MC26 / Cappuccino

GRYX / Grey

OPTIONALS

STANDARD High Power Led Lighting

HDD LUX High Power Led Lighting

Dimmer Kit

Aerofoil Louvre (Line)pc

Side Rafter.....cm
Quantity.....pc

Support Post of Side Rafter..... cm
Quantity pc

Gutter Flush with Rafter (Type B-Flush Finish)

Additional Rail pc

Supporting Steel Structure With Post

Supporting Steel Structure With Post (Galvanized)

Wall Installation Steel Beam

Wall Installation Steel Beam (Galvanized)

Additional Post Of Supporting Steel Structure pc

Additional Post Of Supp. Steel Str. (Galvanized) pc

Side Overhang (max. 100cm per side) Type..... (I / II / III / IV / V / VI)
Left Overhang:.....cm Right Overhang:.....cm

Storm Channel for Joining System & Double Rafter Wall
Bracket Kit (for Multiple Systems)

INSTALLATION BRACKET

Wall Bracket

Ceiling Bracket

POST INSTALLATION BASE

Type A (Arch Opening)

Type AA (Without Extension)

Type B (Spout)

Type BB (Without Extension)

Type Hidden

ADDITIONAL NOTES & DRAWINGS ATTACHED